Series 200

SALICE

ENG

The Series 200 make up an integrated system of hinges developed to provide a solution to any situation involving concealed hinges.
Bright nickel plated steel cup and arm.
Dimensions of the Ø 35 mm cup.

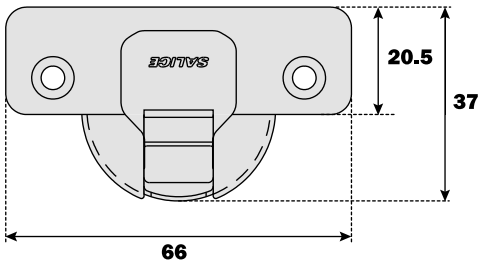

Constant “L” value of 0.7 mm (it does not change during side adjustment).

Approx. number of hinges required according to the door dimension and weight.

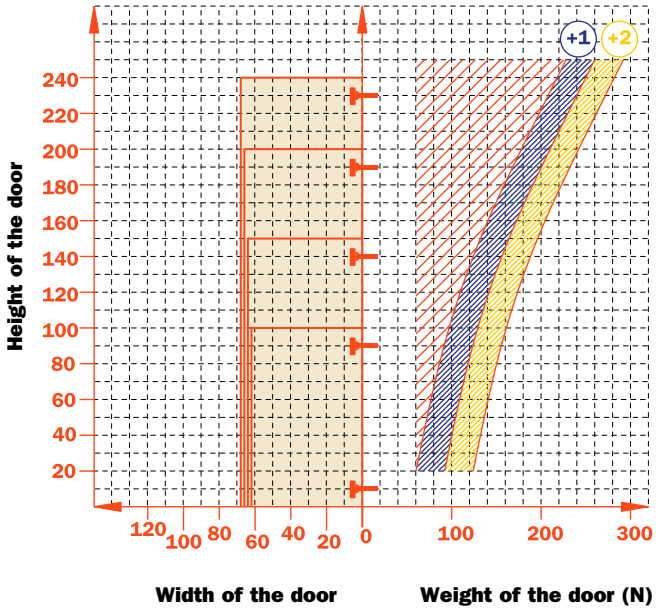

Adjustments

Compensating side adjustment from -1.5 mm to +4.5 mm.
Height adjustment ±2 mm.
Depth adjustment with Series 200 mounting plates +2.8 mm.
Depth adjustment with Domi snap-on mounting plates from -0.5 mm to +2.8 mm.
Anti-sliding safety stop.

Mounting plates

Symmetrical and asymmetrical bright nickel plated steel or die-cast Series 200 mounting plates.
Snap-on assembly on Domi mounting plates.
Positioning with pre-determined stop on traditional Series 200 mounting plates.

N.B. : Use POZIDRIVE No. 2 screwdrivers for all screws.

												
	94°	110°	120°	155° 165°	94°	110°	120°	155° 165°	94°	110°	120°	155° 165°
Wood screw	A	A	A	A	P	P	P	P	U	U	U	U

												
	94°	110°	120°	155° 165°	94°	110°	120°	155° 165°	94°	110°	120°	155° 165°
Rapido 	6	6	6	6	7	7	7	7	2	2	2	2
Dowel	B	B	B	B	R	R	R	R	W	W	W	W
Logica 	I	I	I	I	J	J	J	J	Q	Q	Q	Q

Use this table to identify the available drillings and fixings.
Fill the third position of the hinge code number with the letter or the number corresponding to your choice. I.e.: C2_BA99.

Fill this position with the chosen letter or number.

Series 200 - For thicker doors - 94° opening

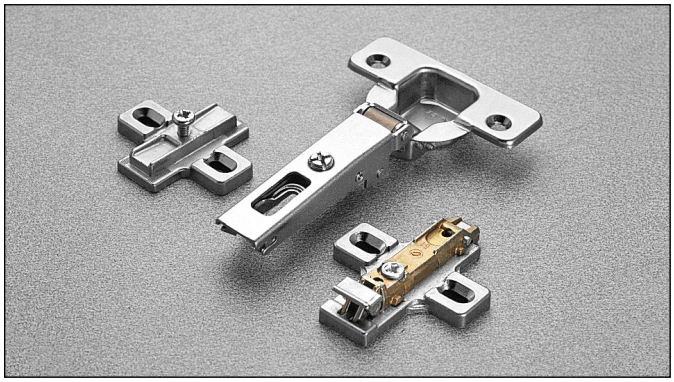

Technical information

For thicker doors, max. 35 mm, with special profiles.
11 mm deep metal cup.
94° opening.
Possible drilling distance on the door (K): from 3 to 9 mm.
Compatible with all traditional Series 200 mounting plates and with all Domi snap-on mounting plates.

Space needed to open the door



	T=	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35
K=3	**A=**	0.1	0.2	0.3	0.4	0.5	0.7	0.8	1.0	1.6	2.6	3.5	4.5	5.4	6.4	7.4	8.3	9.3
K=4	**A=**	0.1	0.2	0.3	0.4	0.5	0.7	0.8	1.0	1.2	1.9	2.8	3.8	4.7	5.7	6.6	7.6	8.6
K=5	**A=**	0.1	0.2	0.3	0.4	0.5	0.7	0.8	1.0	1.2	1.4	2.2	3.1	4.1	5.0	5.9	6.9	7.8
K=6	**A=**	0.1	0.2	0.3	0.4	0.5	0.6	0.8	1.0	1.2	1.4	1.7	2.6	3.5	4.4	5.3	6.2	7.2
K=7	**A=**	0.1	0.2	0.3	0.4	0.5	0.6	0.8	1.0	1.1	1.3	1.6	2.1	3.0	3.8	4.7	5.6	6.5
K=8	**A=**	0.1	0.2	0.3	0.4	0.5	0.6	0.8	0.9	1.1	1.3	1.6	1.8	2.5	3.3	4.2	5.1	6.0
K=9	**A=**	0.1	0.2	0.3	0.4	0.5	0.6	0.8	0.9	1.1	1.3	1.5	1.8	2.1	2.9	3.7	4.6	5.4



K=	3	4	5	6	7	8	9
L=	0.0	0.0	0.0	0.0	0.0	0.3	1.3

The above values are calculated on the assumption that the doors have square edges. They are reduced if the doors have radiussed edges.

Projection of the door

Projection of the door from the cabinet side at the max. opening. The figures are based on a straight arm hinge, H=0 mm thickness of mounting plate and K value = 3 mm.

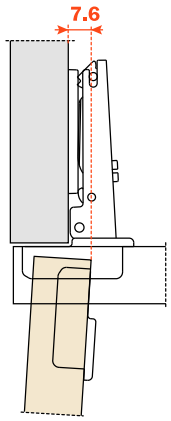

"C" value

With this formula you can obtain the max. thickness of the moulded door that can be opened without touching adjacent carcase sides, doors or walls, whilst bearing in mind the above L-K-T values.

C=23 + K + **A**



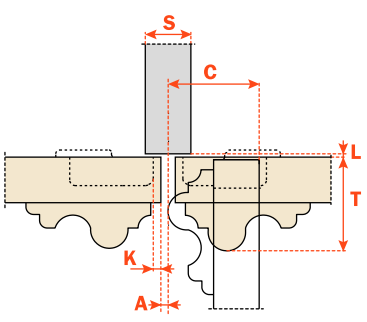

Packing
Boxes 300 pcs.
Pallets 7.200 pcs.

CA sprung hinge
CL unsprung hinge

Use these formulas to determine the type of hinge arm, the drilling distance “K” and the height of the mounting plate “H” which is necessary to solve each application problem.

Use the tables “Drillings and fixings” at page 3 to complete the code number of the desired hinge.

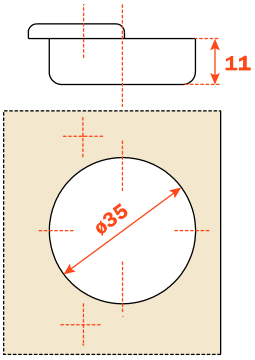

Arm **0**

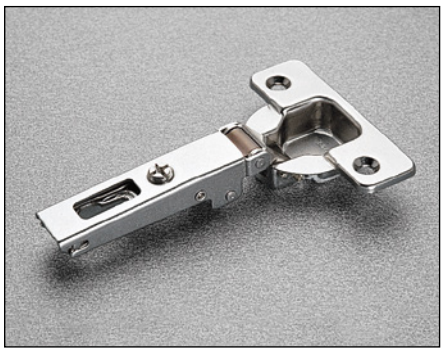

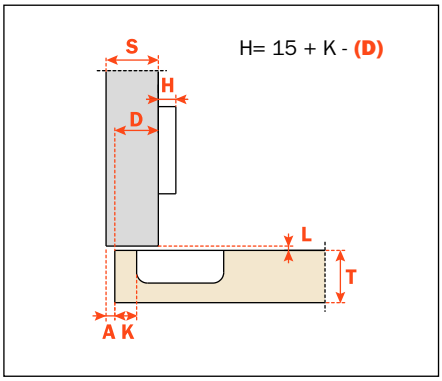

H= 15 + K - **(D)**

CA - C2_BA99
CL - C2_AA99

Arm **5**

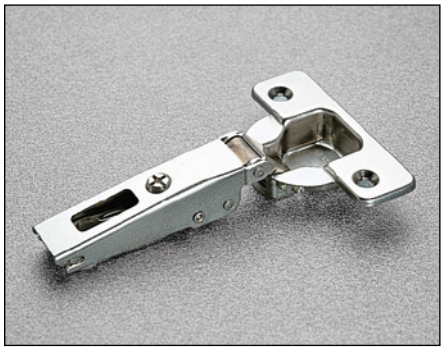

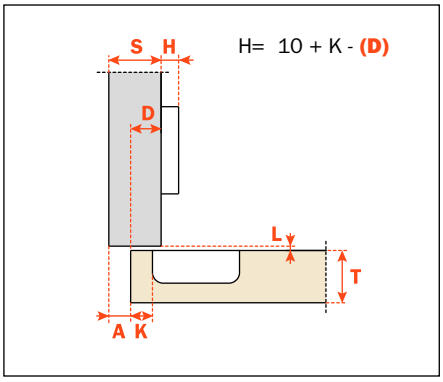

H= 10 + K - **(D)**

CA - C2_BD99
CL - C2_AD99

Arm **9**

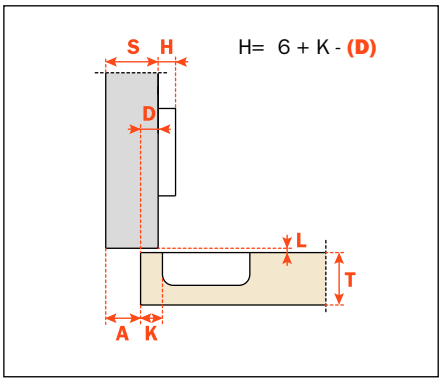

H= 6 + K - **(D)**

CA - C2_BG99
CL - C2_AG99

Arm **17**

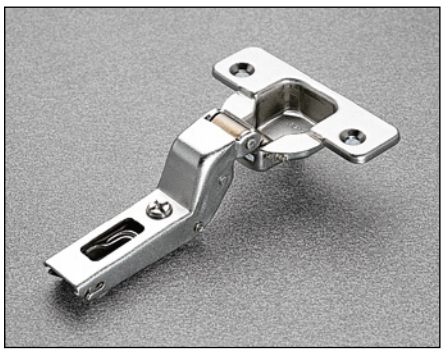

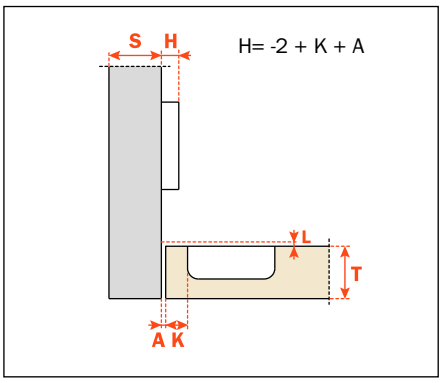

H= -2 + K + A

CA - C2_BP99
CL - C2_AP99

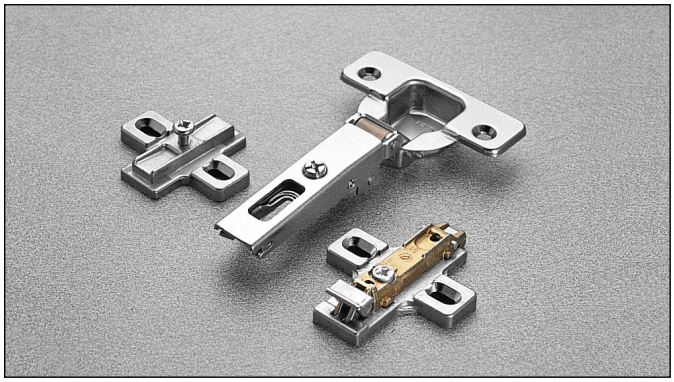

Technical information

When a greater opening angle is required.
11 mm deep metal cup.
110° opening.
Possible drilling distance on the door (K): from 3 to 6 mm.
Compatible with all traditional Series 200 mounting plates and with all Domi snap-on mounting plates.

Space needed to open the door



	T=	16	17	18	19	20	21	22	23	24	25	26
K=3	**A=**	0.5	0.7	0.9	1.2	1.5	1.8	2.4	3.7	5.1	6.5	7.8
K=4	**A=**	0.5	0.7	0.9	1.2	1.5	1.8	2.1	2.7	4.1	5.5	6.8
K=5	**A=**	0.5	0.7	0.9	1.2	1.5	1.8	2.1	2.6	3.1	4.1	5.4
K=6	**A=**	0.5	0.7	0.9	1.2	1.5	1.8	2.1	2.5	3.0	3.5	4.4



	T=	16	17	18	19	20	21	22	23	24	25	26
K=3	**L=**	0.0	0.0	0.0	0.0	0.2	0.5	0.8	1.1	1.4	1.7	1.9
K=4	**L=**	0.0	0.0	0.3	0.6	0.9	1.2	1.4	1.7	2.0	2.3	2.6
K=5	**L=**	1.1	1.3	1.6	1.8	2.1	2.3	2.6	2.9	3.1	3.4	3.6
K=6	**L=**	2.0	2.3	2.5	2.8	3.1	3.3	3.6	3.8	4.1	4.3	4.6

The above values are calculated on the assumption that the doors have square edges. They are reduced if the doors have radiussed edges.

Projection of the door

Projection of the door from the cabinet side at the max. opening. The figures are based on a straight arm hinge, H=0 mm thickness of mounting plate and K value = 3 mm.

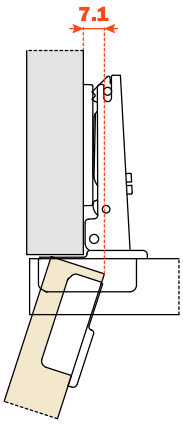

"C" value

With this formula you can obtain the max. thickness of the moulded door that can be opened without touching adjacent carcase sides, doors or walls, whilst bearing in mind the above L-K-T values.

C=20 + K+ **A**



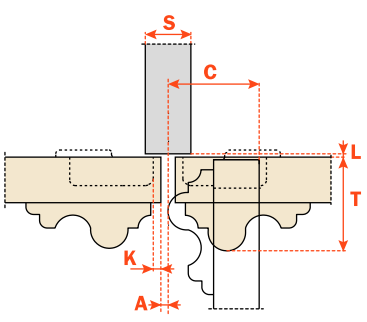

Packing
Boxes 300 pcs.
Pallets 7.200 pcs.

CA sprung hinge
CL unsprung hinge

Use these formulas to determine the type of hinge arm, the drilling distance “K” and the height of the mounting plate “H” which is necessary to solve each application problem.

Use the tables “Drillings and fixings” at page 3 to complete the code number of the desired hinge.

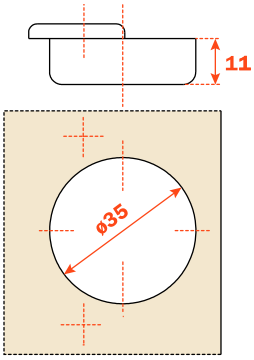

Arm **0**

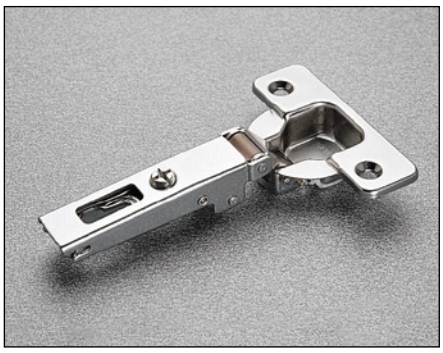

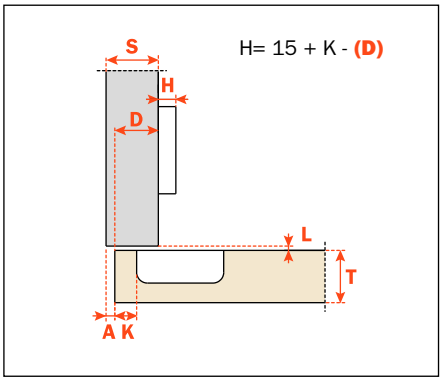

H= 15 + K - **(D)**

CA - C2_6A99
CL - C2_4A99

Arm **5**

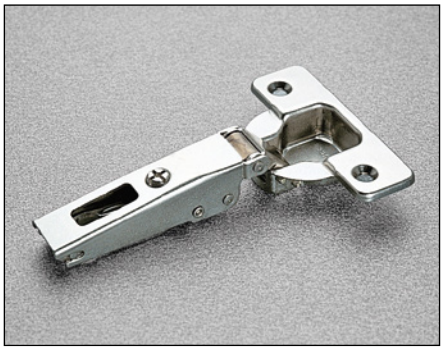

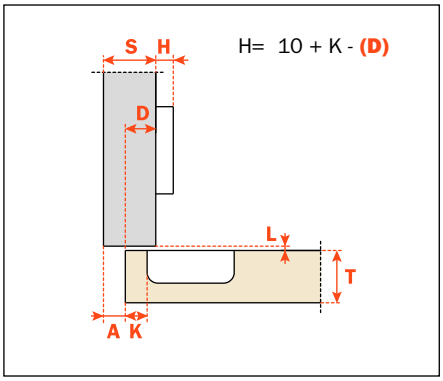

H= 10 + K - **(D)**

CA - C2_6D99
CL - C2_4D99

Arm **9**

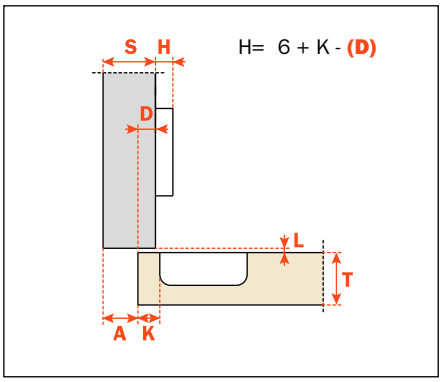

H= 6 + K - **(D)**

CA - C2_6G99
CL - C2_4G99

Arm **17**

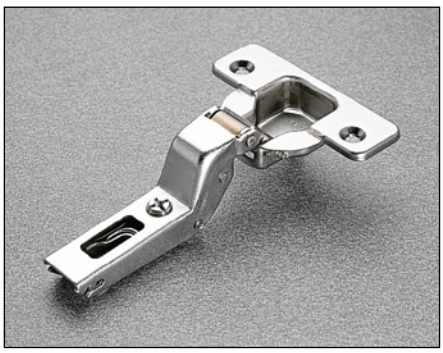

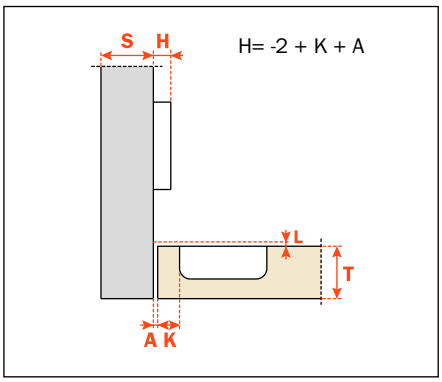

H= -2 + K + A

CA - C2_6P99
CL - C2_4P99

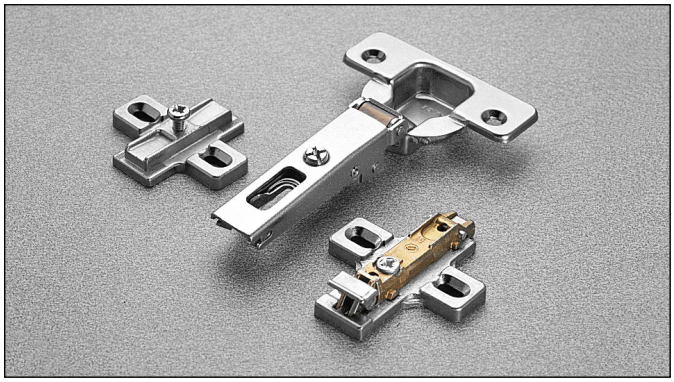

Technical information

When a greater opening angle is required.
11 mm deep metal cup.
120° opening.
Possible drilling distance on the door (K): from 3 to 6 mm.
Compatible with all traditional Series 200 mounting plates and with all Domi snap-on mounting plates.

Space needed to open the door



	T=	16	17	18	19	20	21	22	23	24	25	26
K=3	**A=**	1.0	1.3	1.6	1.9	2.2	3.5	5.0	6.5	8.1	9.6	11.2
K=4	**A=**	1.0	1.3	1.5	1.9	2.2	2.5	4.0	5.5	7.1	8.6	10.2
K=5	**A=**	1.0	1.2	1.5	1.8	2.1	2.5	3.0	4.5	6.1	7.6	9.2
K=6	**A=**	1.0	1.2	1.5	1.8	2.1	2.4	2.8	3.5	5.1	6.6	8.1



	T=	16	17	18	19	20	21	22	23	24	25	26
K=3	**L=**	0.0	0.0	0.0	0.0	0.1	0.5	0.9	1.3	1.7	2.1	2.5
K=4	**L=**	0.0	0.0	0.2	0.6	1.0	1.4	1.8	2.2	2.6	3.1	3.5
K=5	**L=**	0.3	0.7	1.1	1.5	1.9	2.3	2.8	3.2	3.6	4.0	4.4
K=6	**L=**	1.2	1.6	2.0	2.4	2.8	3.3	3.7	4.1	4.5	4.9	5.3

The above values are calculated on the assumption that the doors have square edges. They are reduced if the doors have radiussed edges.

Projection of the door

Projection of the door from the cabinet side at the max. opening. The figures are based on a straight arm hinge, H=0 mm thickness of mounting plate and K value = 3 mm.

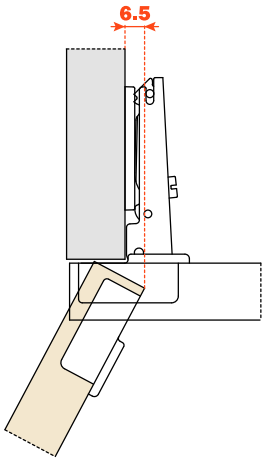

"C" value

With this formula you can obtain the max. thickness of the moulded door that can be opened without touching adjacent carcase sides, doors or walls, whilst bearing in mind the above L-K-T values.

C=20 + K+ **A**



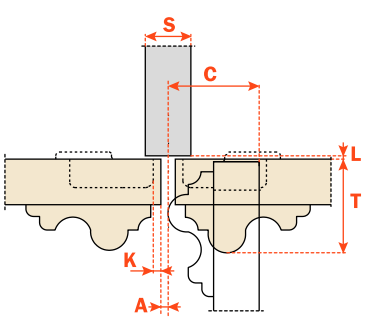

Packing
Boxes 300 pcs.
Pallets 7.200 pcs.

CA sprung hinge
CL unsprung hinge

Use these formulas to determine the type of hinge arm, the drilling distance “K” and the height of the mounting plate “H” which is necessary to solve each application problem.

Use the tables “Drillings and fixings” at page 3 to complete the code number of the desired hinge.

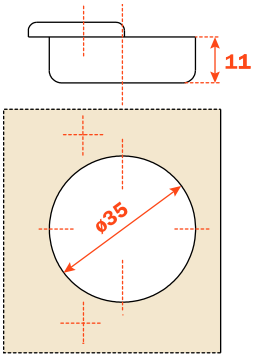

Arm **0**

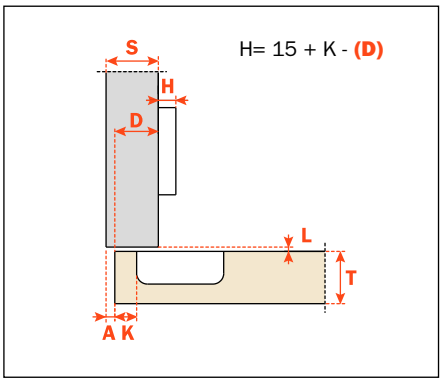

CA - C2_9A99
CL - C2_8A99

Arm **5**

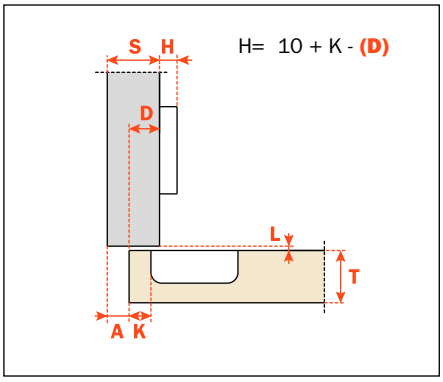

CA - C2_9D99
CL - C2_8D99

Arm **9**

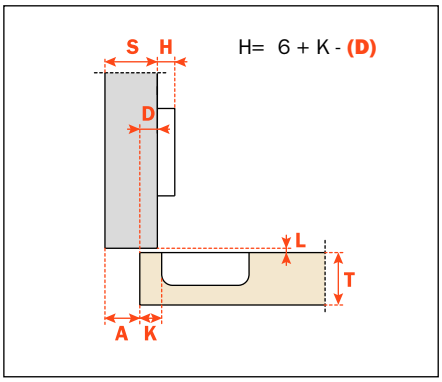

CA - C2_9G99
CL - C2_8G99

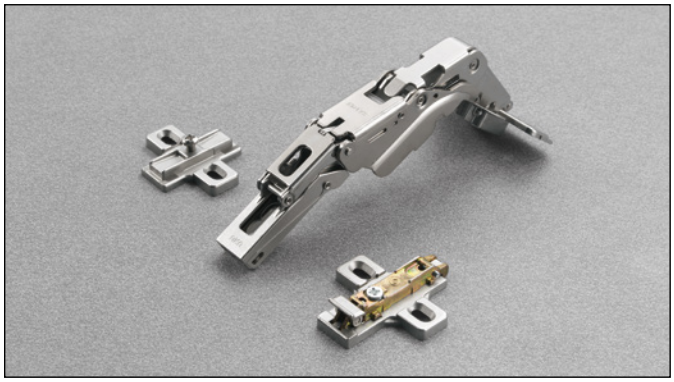

Technical information

For doors max. 28 mm.
Hinge with greater opening angle and reduced operating profile.
8.5 mm deep die-cast cup.
155° opening.
Possible drilling distance on the door (K): from 3 to 9 mm.
Compatible with all traditional Series 200 mounting plates and with all Domi snap-on mounting plates.

Space needed to open the door



	T=	16	18	20	22	24	25	26	27	28
K=3	A=	0.0	0.0	0.0	0.0	0.0	0.10	0.40	0.75	1.20
K=4	A=	0.0	0.0	0.0	0.0	0.0	0.15	0.45	0.85	1.35
K=5	A=	0.0	0.0	0.0	0.0	0.0	0.20	0.50	0.95	125° 1.70
K=6	A=	0.0	0.0	0.0	0.0	0.0	0.25	0.60	1.10	125° 1.95
K=7	A=	0.0	0.0	0.0	0.0	0.0	0.30	0.70	1.30	95° 2.30
K=8	A=	0.0	0.0	0.0	0.0	0.0	0.35	0.85	125° 1.70	95° 2.80
K=9	A=	0.0	0.0	0.0	0.0	0.15	0.55	1.20	95° 2.15	

With stop device at 95° item S2BM37XG
With stop device at 125° item S2AM37XG

Spaces with removable components.

The door combined with a mounting plate H=0 and a straight arm hinge opens at 90° with lateral door protrusion of 6 mm.

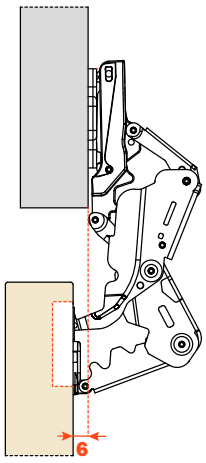

"C" value

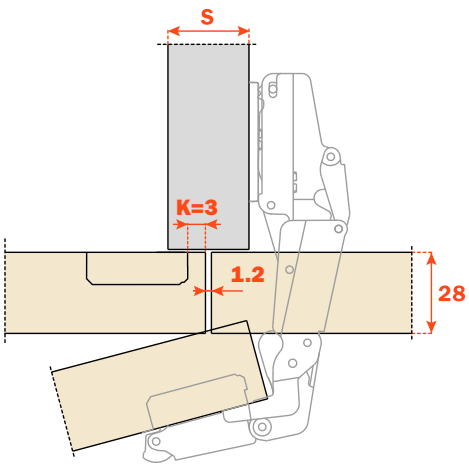

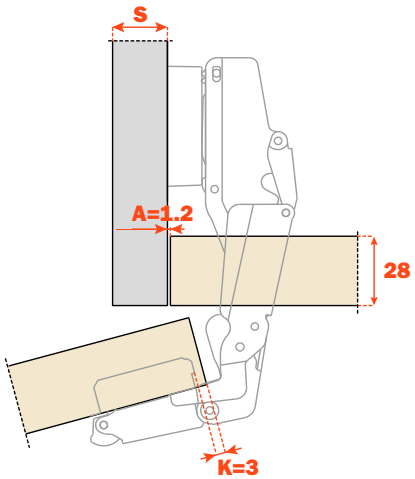

Packing
Boxes 100 pcs.
Pallets 2.400 pcs.

CA sprung hinge

Use these formulas to determine the type of hinge arm, the drilling distance “K” and the height of the mounting plate “H” which is necessary to solve each application problem.

To limit the opening of the hinge, see the leaflet “Accessories”.

Use the tables “Drillings and fixings” at page 3 to complete the code number of the desired hinge.

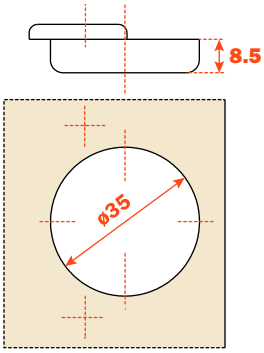

Arm **0**

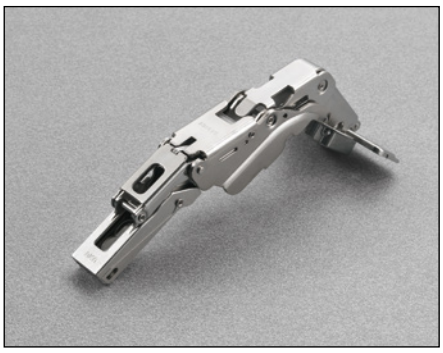

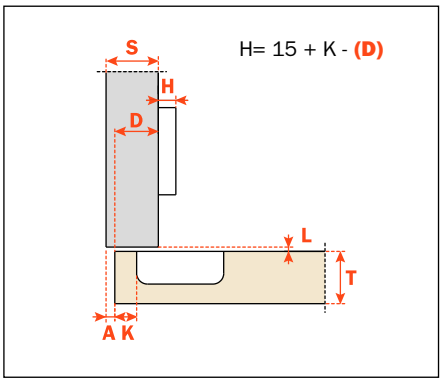

H= 15 + K - **(D)**

CA - C2_KA99

Arm **5**

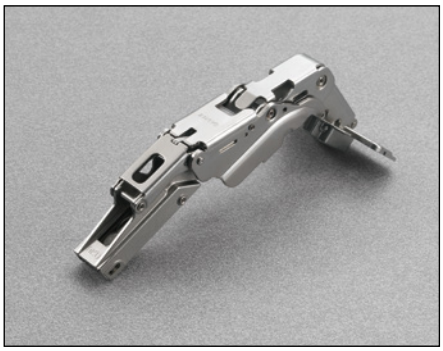

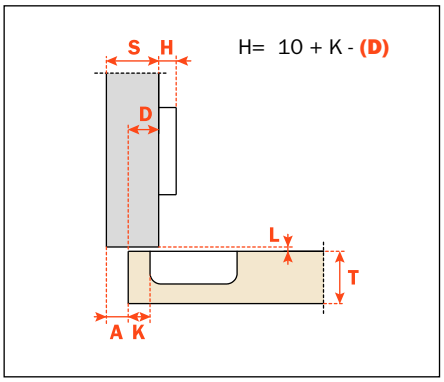

H= 10 + K - **(D)**

CA - C2_KD99

Arm **9**

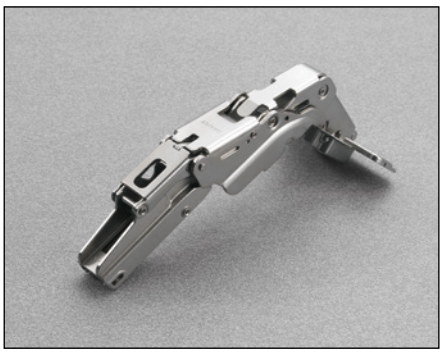

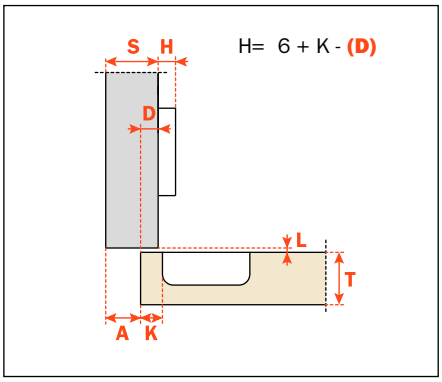

H= 6 + K - **(D)**

CA - C2_KG99

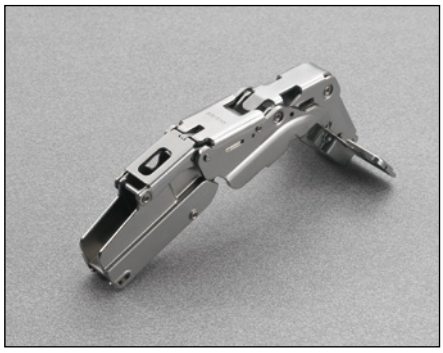

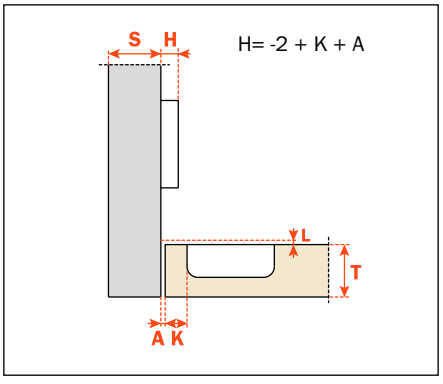

H= -2 + K + A

CA - C2_KP99

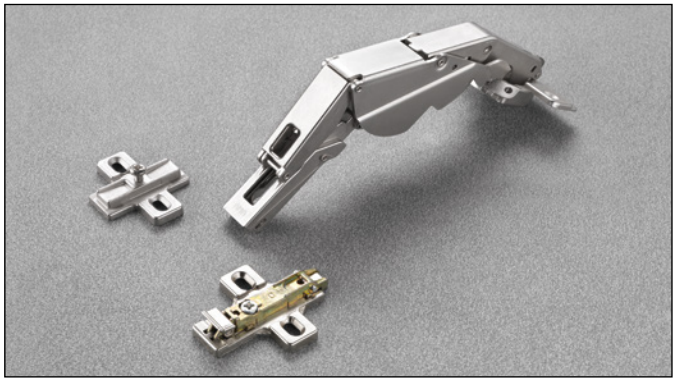

Technical information

For thicker doors max. 35 mm.
Hinge with greater opening angle and reduced operating profile.
11 mm deep die-cast cup.
155° opening.
Possible drilling distance on the door (K): from 3 to 9 mm.
Compatible with all traditional Series 200 mounting plates and with all Domi snap-on mounting plates.

Space needed to open the door



	T=	27	28	29	30	31	32	33	34	35	36
K=3	**A=**	0.0	0.0	0.2	0.6	0.8	1.0	1.4	1.9	2.3	3.0
K=4	**A=**	0.0	0.0	0.2	0.6	0.8	1.0	1.4	1.9	2.3	3.0
K=5	**A=**	0.0	0.0	0.2	0.6	0.8	1.1	1.5	1.9	2.5	3.2
K=6	**A=**	0.0	0.0	0.2	0.6	0.8	1.2	1.6	1.9	2.5	3.8
K=7	**A=**	0.0	0.0	0.2	0.6	0.8	1.3	1.7	2.1	2.7	3.9
K=8	**A=**	0.0	0.0	0.2	0.6	0.8	1.4	1.7	2.1	2.7	4.0
K=9	**A=**	0.0	0.0	0.2	0.6	0.8	1.4	1.7	2.1	3.0	4.0

The above values are calculated on the assumption that the doors have square edges.
They are reduced if the doors have radiussed edges.

“C” value

For spaces with removable components. The door combined with a mounting plate H=0 opens at 90° with lateral door protrusion of 3.5 mm.

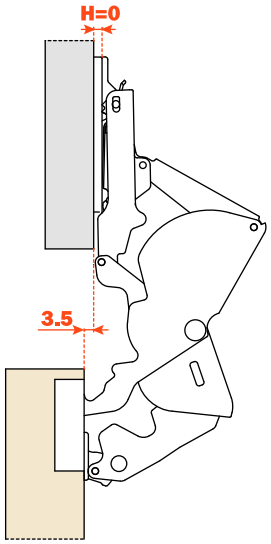

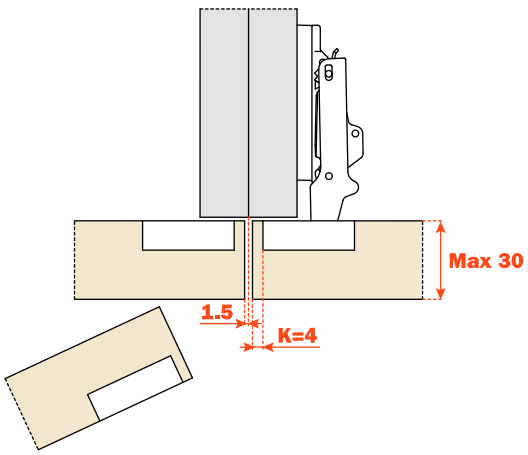

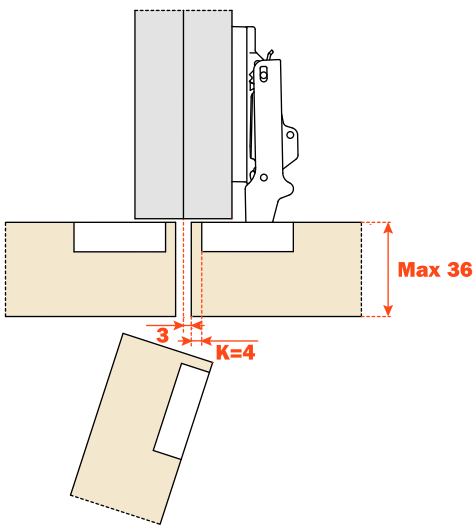

With stop device 110°

Packing
Boxes 100 pcs.
Pallets 2.400 pcs.

CA sprung hinge

Use these formulas to determine the type of hinge arm, the drilling distance “K” and the height of the mounting plate “H” which is necessary to solve each application problem.

To limit the opening of the hinge, see the leaflet “Accessories”.

Use the tables “Drillings and fixings” at page 3 to complete the code number of the desired hinge.

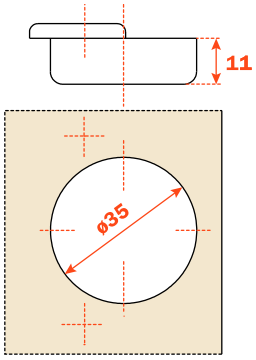

Arm **0**

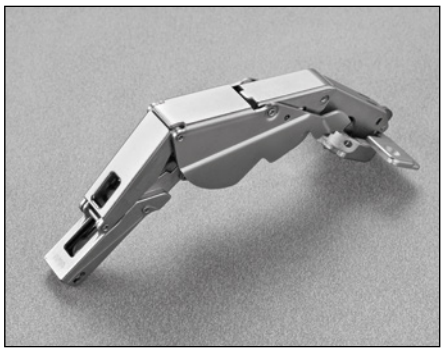

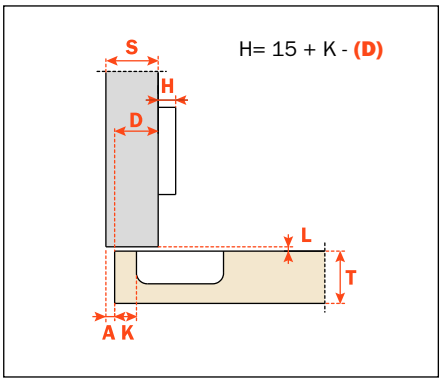

H= 15 + K - **(D)**

CA - C2_HA99

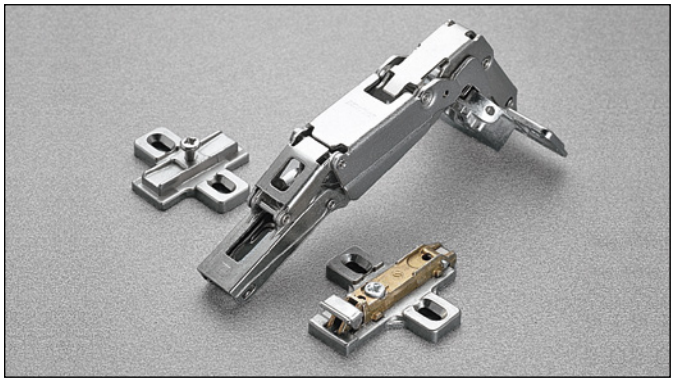

Technical information

Hinge with greater opening angle and reduced operating profile.
11 mm deep die-cast cup.
165° opening.
Possible drilling distance on the door (K): from 3 to 8 mm.
Compatible with all traditional Series 200 mounting plates and with all Domi snap-on mounting plates.

Space needed to open the door



	T=	16	18	20	22	24	26	28
K=3	A=	0.0	0.0	0.0	0.7	2.7	4.6	7.9
K=4	A=	0.0	0.0	0.0	0.1	1.8	3.8	6.9
K=5	A=	0.0	0.0	0.0	0.1	1.2	3.0	5.9
K=6	A=	0.0	0.0	0.0	0.1	0.9	2.5	4.9
K=7	A=	0.0	0.0	0.0	0.1	0.7	2.0	3.9
K=8	A=	0.0	0.0	0.0	0.1	0.6	1.7	3.2

The above values are calculated on the assumption that the doors have square edges. They are reduced if the doors have radiussed edges.

"C" value

For spaces with removable components. Opening with lateral door protrusion equal to 5.5 mm with a hinge with straight arm, H=0 mounting plate and K=3 mm.

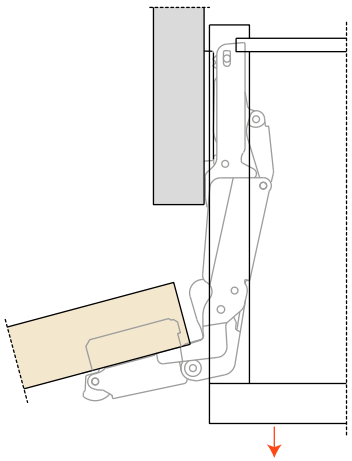

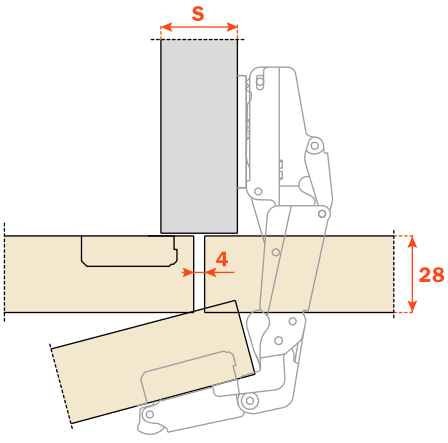

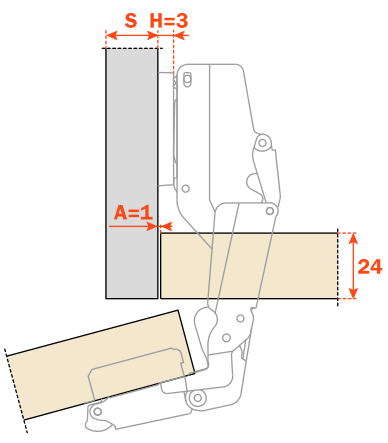

Packing
Boxes 100 pcs.
Pallets 2.400 pcs.

CA sprung hinge
CL unsprung hinge

Use these formulas to determine the type of hinge arm, the drilling distance “K” and the height of the mounting plate “H” which is necessary to solve each application problem.

To limit the opening of the hinge, see the leaflet “Accessories”.

Use the tables “Drillings and fixings” at page 3 to complete the code number of the desired hinge.

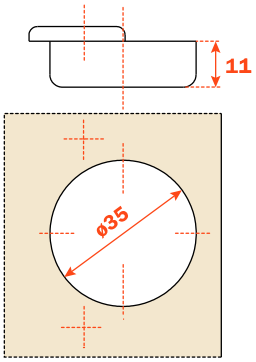

Arm **0**

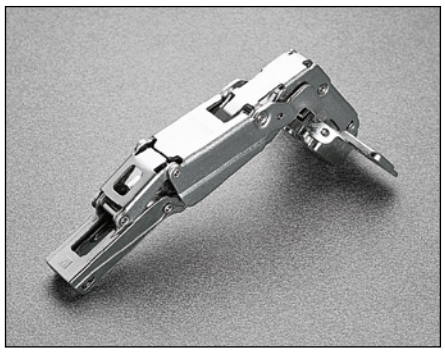

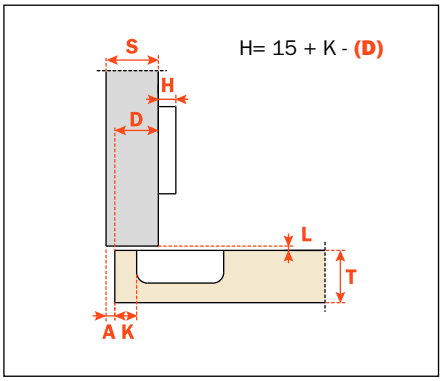

H= 15 + K - **(D)**

CA - C2_FA99
CL - C2_EA99

Arm **5**

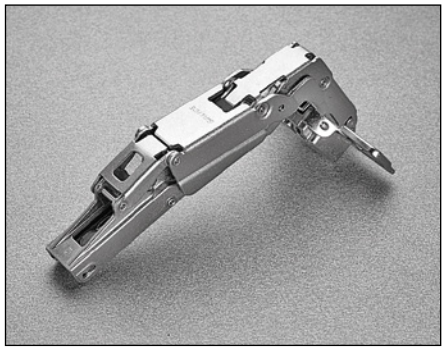

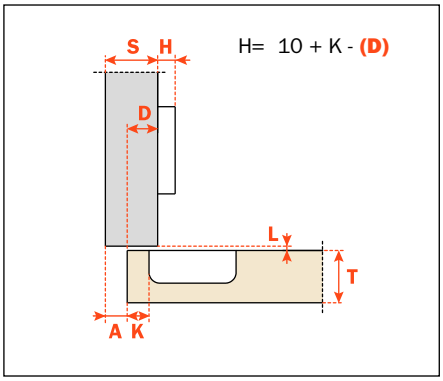

H= 10 + K - **(D)**

CA - C2_FD99
CL - C2_ED99

Arm **9**

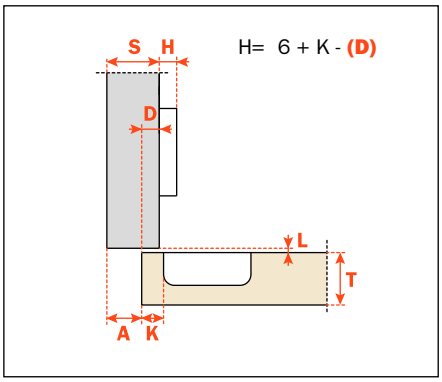

H= 6 + K - **(D)**

CA - C2_FG99
CL - C2_EG99

Arm **17**

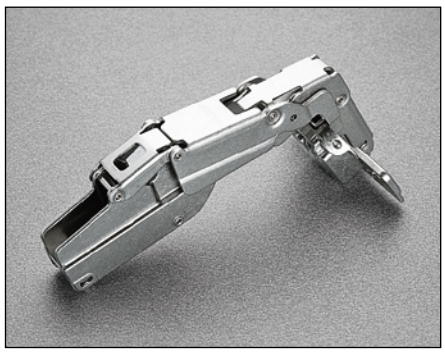

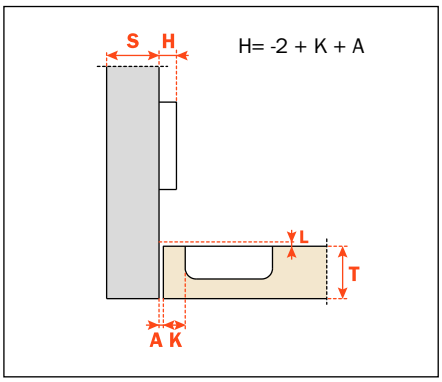

H= -2 + K + A

CA - C2_FP99
CL - C2_EP99

Technical information

Hinges for glass doors.
Hole diameter 26 mm.
94° opening.
For use with glass from 4 mm to 6 mm thickness.
Possible drilling distance on the door (K): from 5.5 to 6.5 mm.
Compatible with all traditional Series 200 mounting plates and with all Domi snap-on mounting plates.

P2CTA

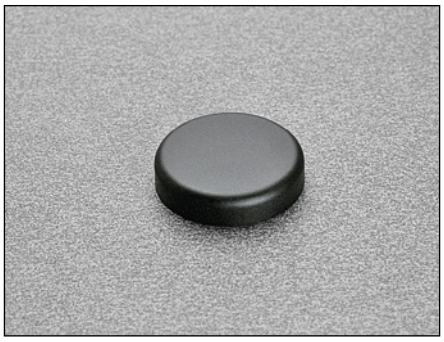



P2CBA



P2CQA

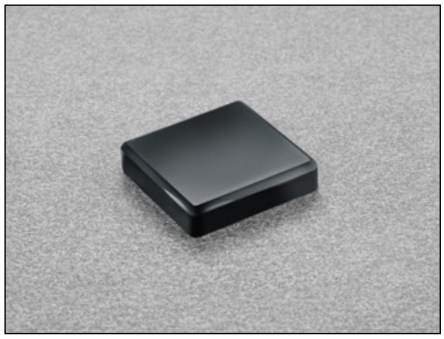



Fancy covers

see the leaflet “Accessories”
for the available finishes.

Packing
Boxes 150 pcs.
Pallets 3.600 pcs.

CA sprung hinge

Use these formulas to determine the type of hinge arm, the drilling distance “K” and the height of the mounting plate “H” which is necessary to solve each application problem.



Arm **0**

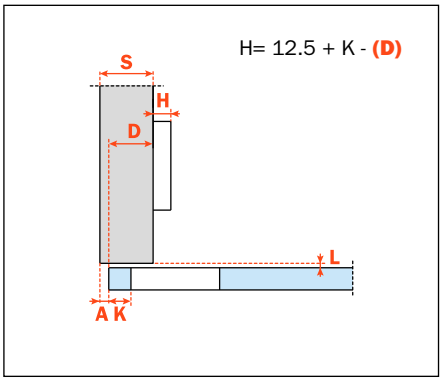

CA - C2C7A39

Arm **5**

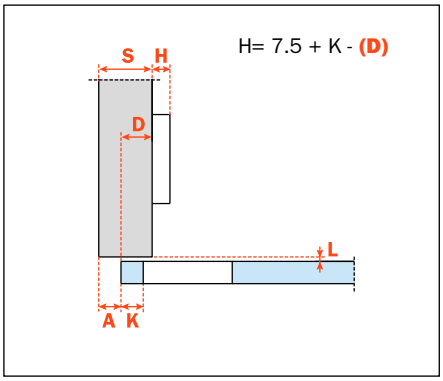

CA - C2C7D39

Arm **9**

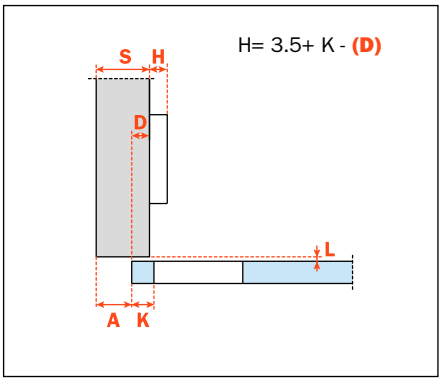

CA - C2C7G39

Arm **17**

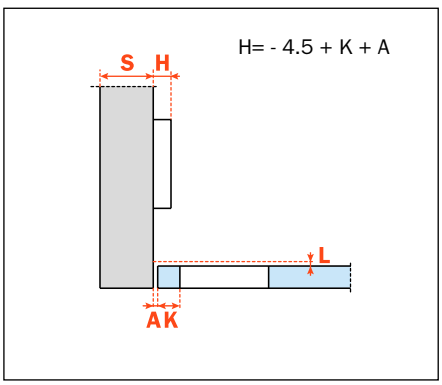

CA - C2C7P39

Packing
Boxes 150 pcs.
Pallets 3.600 pcs.

CA sprung hinge

The solution of assembly problems where doors are mounted at a positive or negative angle requires the verification of drilling distances by a practical trial. Please do not hesitate to consult our technical support department for assistance.

Technical information

Hinges for glass doors with positive angled assembly.
Hole diameter 26 mm.
94° opening.
For use with glass from 4 mm to 6 mm thickness.
Possible drilling distance on the door (K): from 5.5 to 6.5 mm.
Compatible with all Series 200 traditional mounting plates and with all Domi snap-on mounting plates.

Applications with doors set at any angle between – 7.5° to + 70° are possible by combining the appropriate hinge and mounting plate.

Arm **30°**

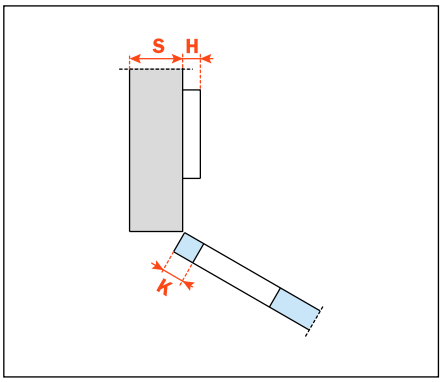

CA - C2C7E39

Arm **45°**

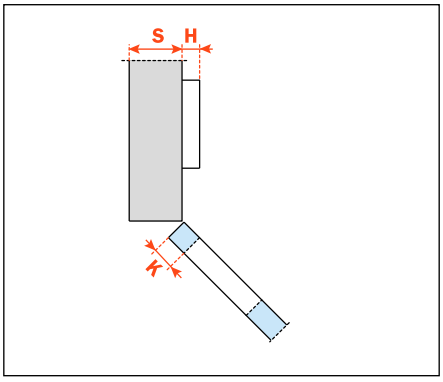

CA - C2C7M39

Crampon

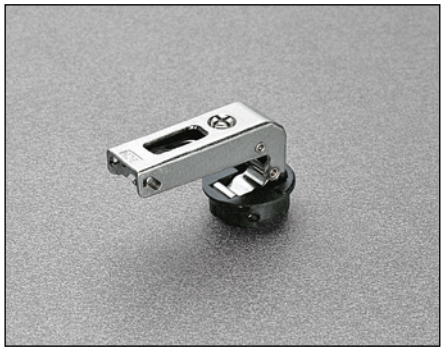

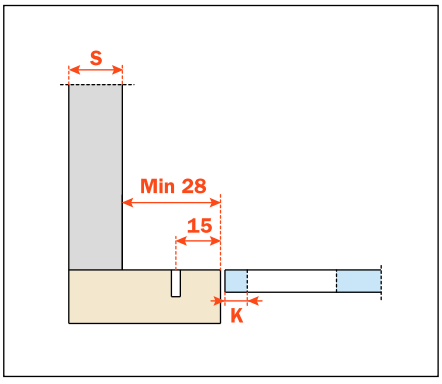

Crampon hinges. To be used only with Series 200 mounting plates for traditional assembly and drilling 28x32 mm.

CA - C2C7N39

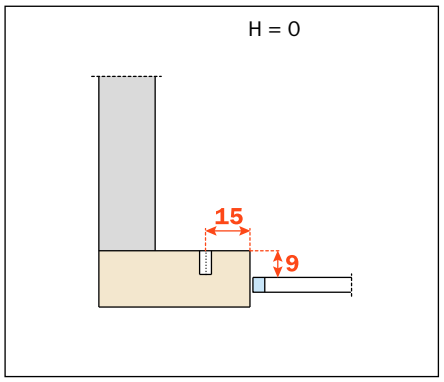

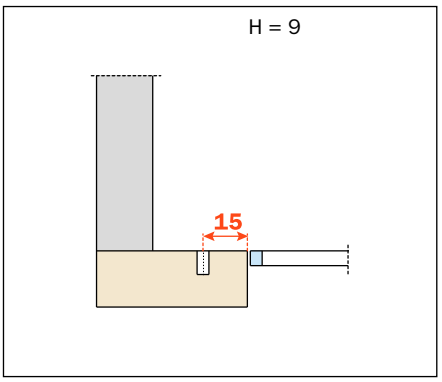

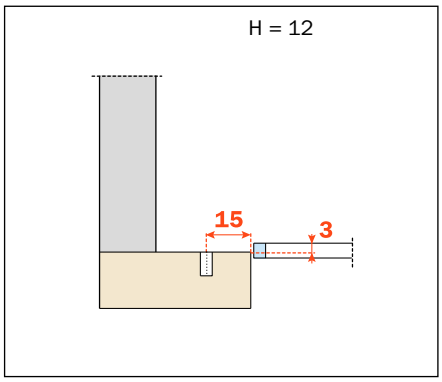

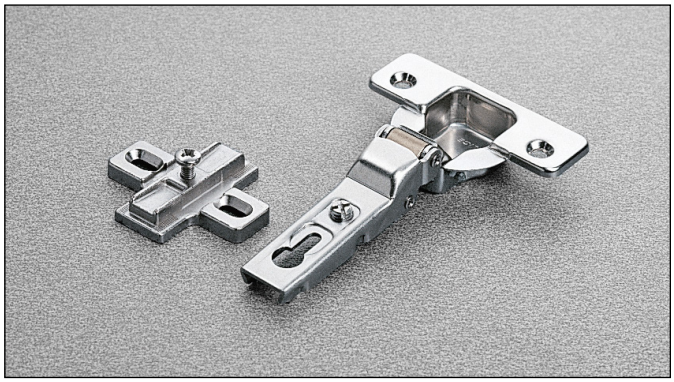

Technical information

Hinges for fridge doors.
11 mm deep metal cup.
94° opening.
Possible drilling distance on the door (K): from 3 to 9 mm.
Compatible with all traditional Series 200 mounting plates.
NOT COMPATIBLE with Domi snap-on mounting plates.

Packing
Boxes 150 pcs.
Pallets 3.600 pcs.

CA sprung hinge

Use the tables “Drillings and fixings” at page 3 to complete the code number of the desired hinge.

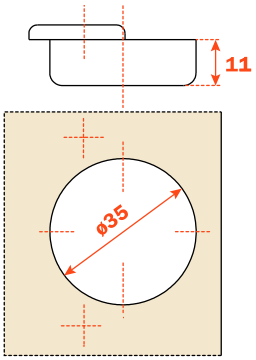

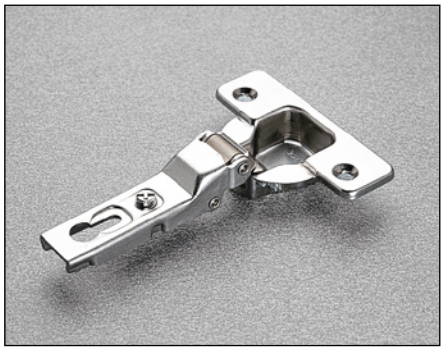

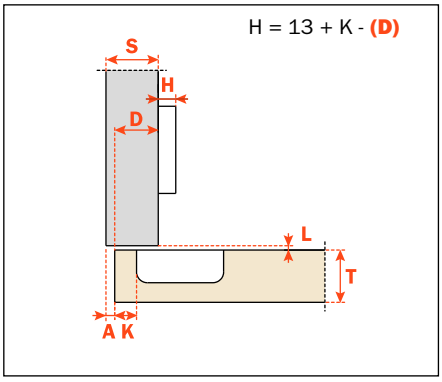

CA - C2_BF99

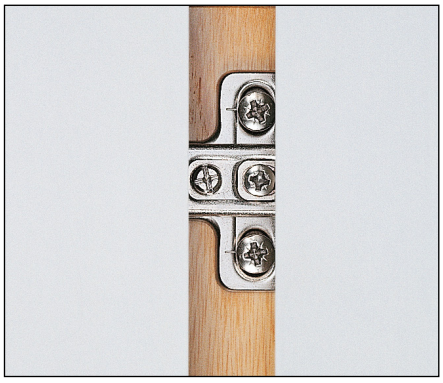

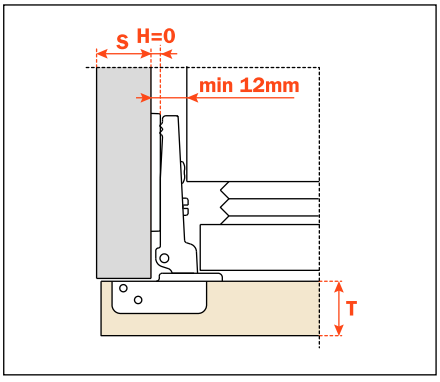

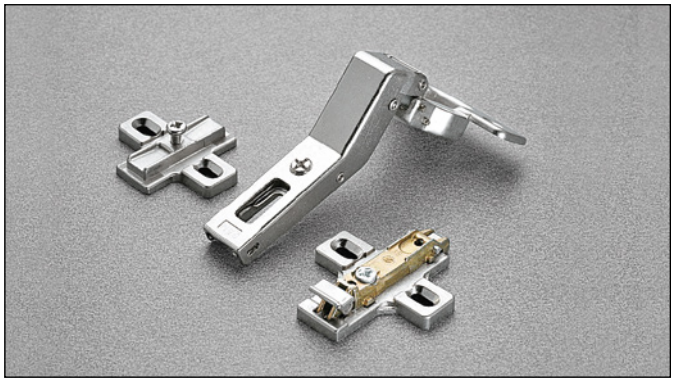

Technical information

Hinges for wooden doors with positive angled assembly.
11 mm deep metal cup.
94° opening.
Possible drilling distance on the door (K): from 3 to 9 mm.
Compatible with all traditional Series 200 mounting plates and with all Domi snap-on mounting plates.

Packing
Boxes 150 pcs.
Pallets 3.600 pcs.

CA sprung hinge

The solution of assembly problems where doors are mounted at a positive or negative angle requires the verification of drilling distances by a practical trial. Please do not hesitate to consult our technical support department for assistance.

Use the tables “Drillings and fixings” at page 3 to complete the code number of the desired hinge.

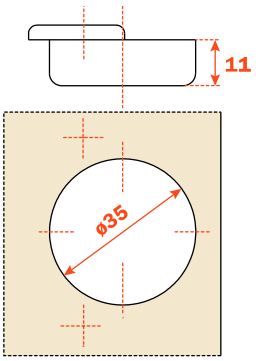

Arm **15°**

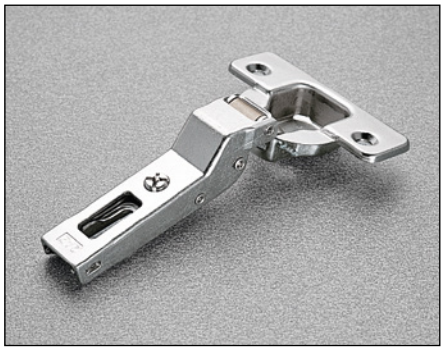

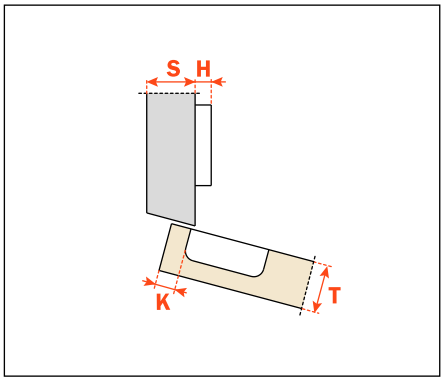

CA - C2_BZ99

Arm **24°**

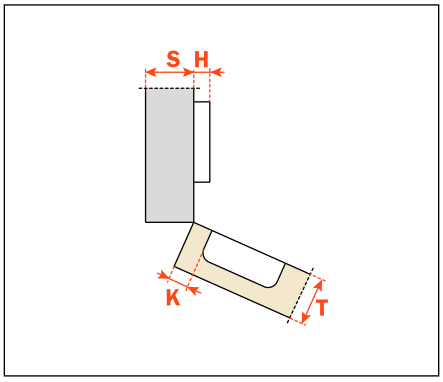

CA - C2_BU99

Arm **30°**

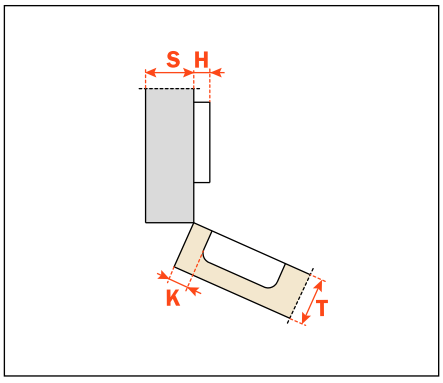

CA - C2_BE99

Arm **30°**

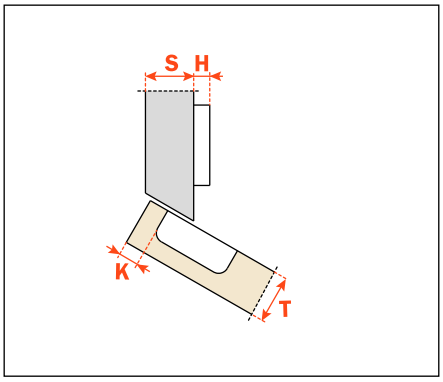

CA - C2_BT99

Arm **37°**

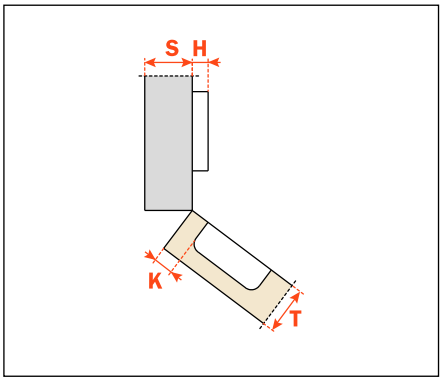

CA - C2_BK99

Arm **45°**

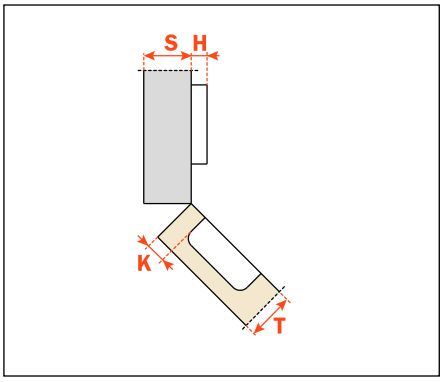

CA - C2_BM99

Arm **45°**

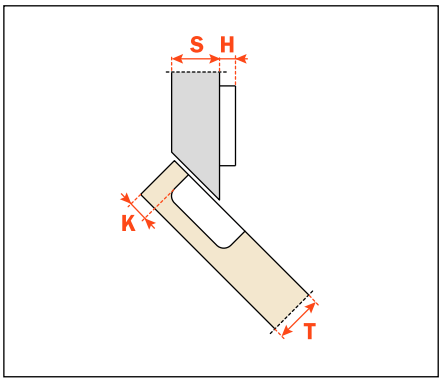

CA - C2_BV99

Arm **45°**

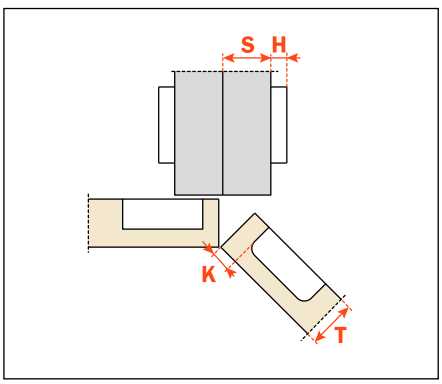

CA - C2_BM99AC

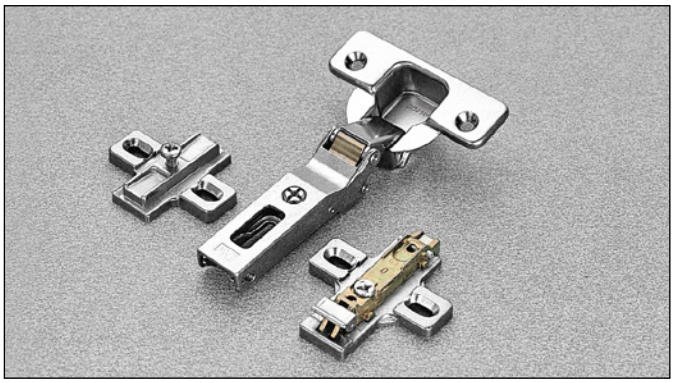

Technical information

Hinges for wooden doors with negative angled assembly.
11 mm deep metal cup.
120° opening.
Possible drilling distance on the door (K): from 3 to 6 mm.
Compatible with all traditional Series 200 mounting plates and with all Domi snap-on mounting plates.

Packing
Boxes 150 pcs.
Pallets 3.600 pcs.

CA sprung hinge

The solution of assembly problems where doors are mounted at a negative angle requires the verification of drilling distances by a practical trial. Please do not hesitate to consult our technical support department for assistance.

Use the tables “Drillings and fixings” at page 3 to complete the code number of the desired hinge.

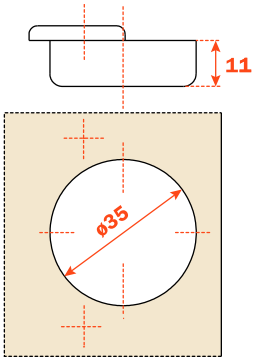

Arm **-30°**

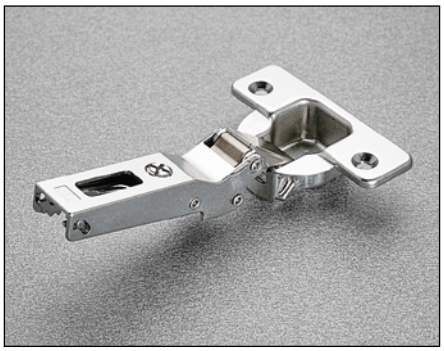

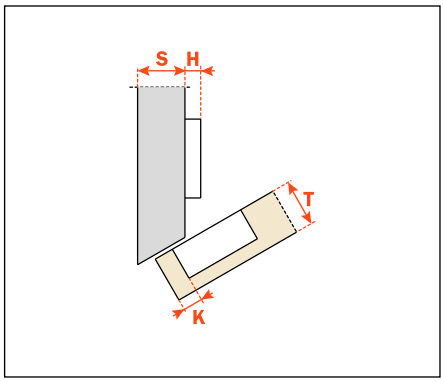

CA - C2_BW99

Arm **-45°**

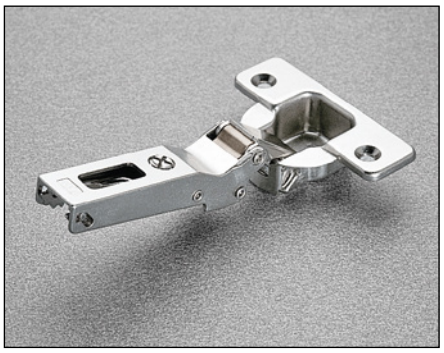

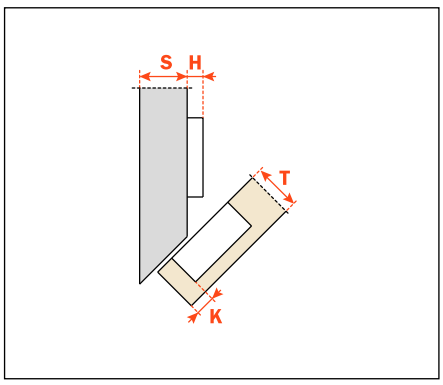

CA - C2_BH99

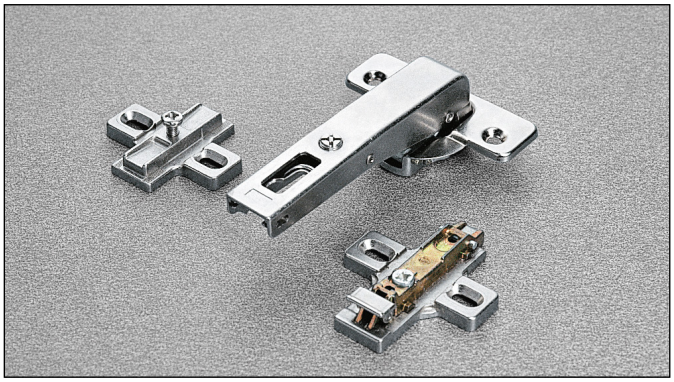

Technical information

Crampon hinges.
For cabinet sides with 37x32 mm standard drilling.
11 mm deep metal cup.
94° opening.
Possible drilling distance on the door (K): from 3 to 9 mm.
Compatible with all traditional Series 200 mounting plates and with all Domi snap-on mounting plates.

Packing
Boxes 150 pcs.
Pallets 3.600 pcs.

CA sprung hinge

E min:
61 mm for Series 200 mounting plates.
70 mm for Domi snap-on mounting plates.
74 mm for Domi snap-on mounting plates with back cam.

Use the tables “Drillings and fixings” at page 3 to complete the code number of the desired hinge.

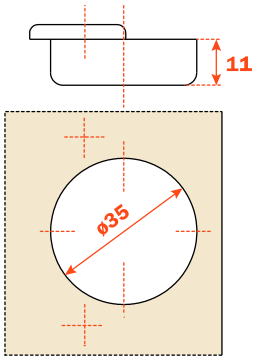

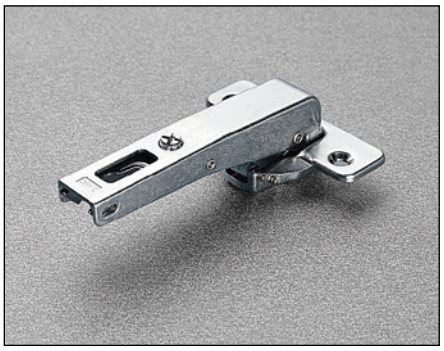

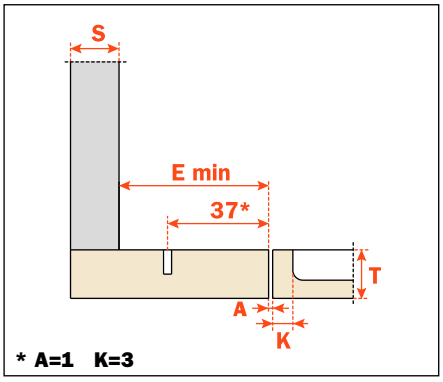

CA - C2_BN99AC

Heights of mounting plates for every assembly.

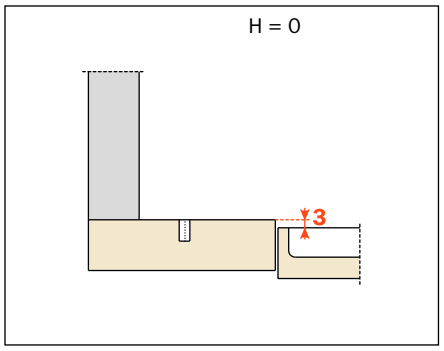

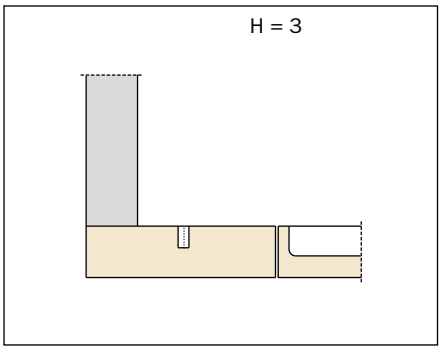

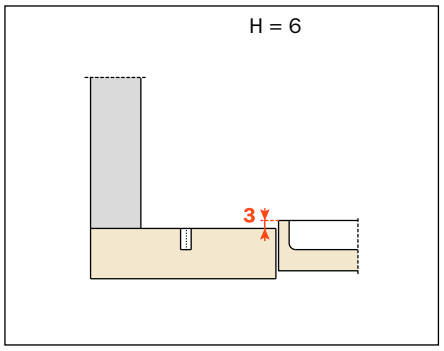

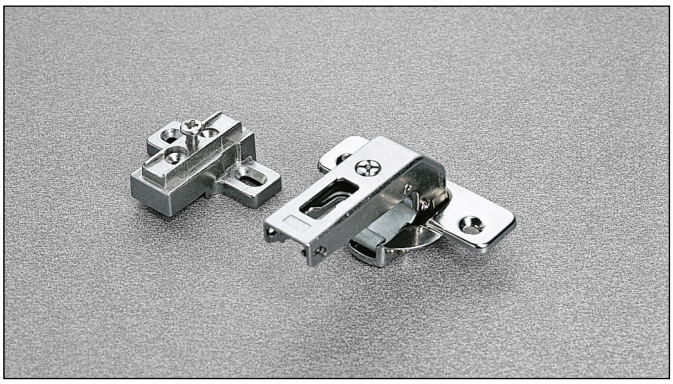

Technical information

Crampon hinges.
For smaller spaces with 15x32 mm drilling.
11 mm deep metal cup.
94° opening.
Possible drilling distance on the door (K): from 3 to 9 mm.
Compatible with all traditional Series 200 mounting plates, 28x32 mm drilling.
NOT COMPATIBLE with Domi snap-on mounting plates.

Packing
Boxes 150 pcs.
Pallets 3.600 pcs.

CA sprung hinge

Use the tables “Drillings and fixings” at page 3 to complete the code number of the desired hinge.

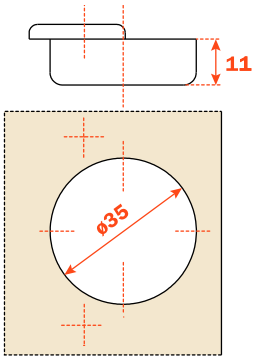

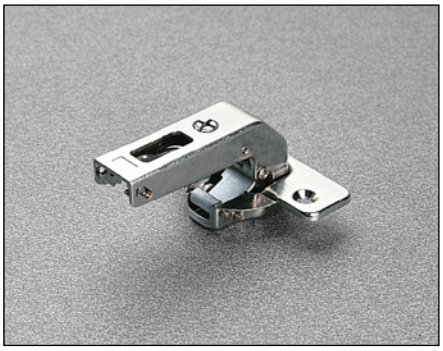

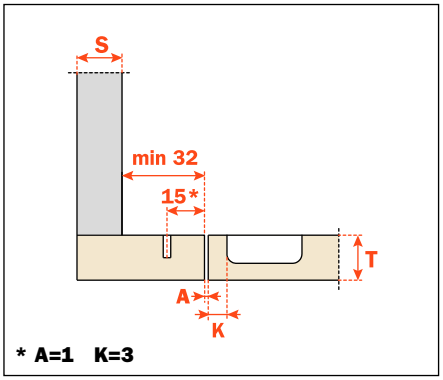

CA - C2_BN99

Heights of mounting plates for every assembly.

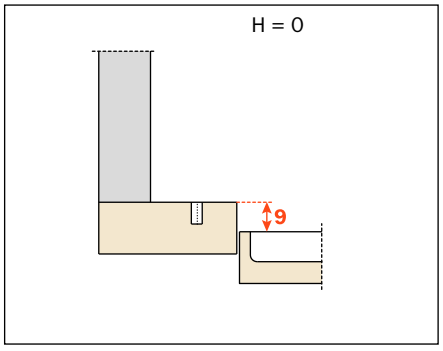

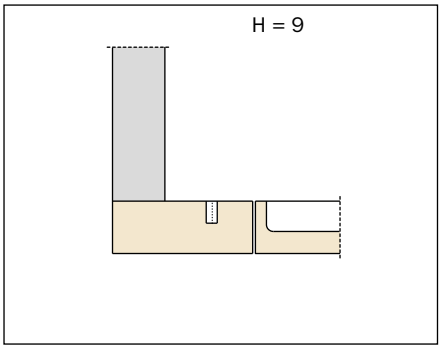

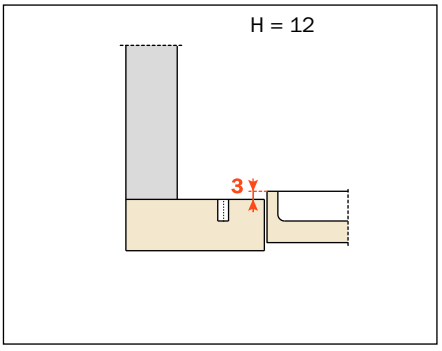

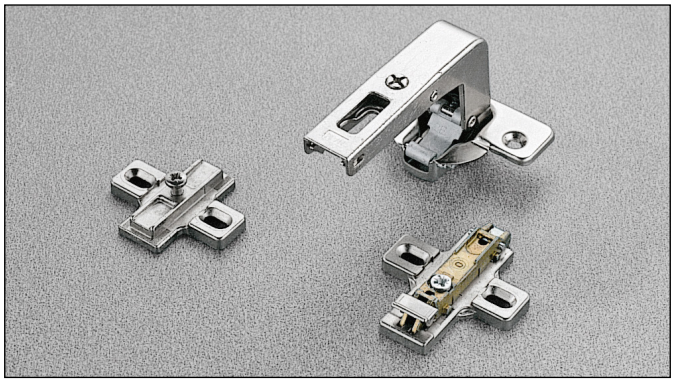

Technical information

Long crampon hinges.
11 mm deep metal cup.
110° opening.
Possible drilling distance on the door (K): from 3 to 6 mm.
Compatible with all traditional Series 200 mounting plates and with all Domi snap-on mounting plates.

Packing
Boxes 150 pcs.
Pallets 3.600 pcs.

CA sprung hinge

E min:
61 mm for Series 200 mounting plates.
70 mm for Domi snap-on mounting plates.
74 mm for Domi snap-on mounting plates with back cam.

Use the tables “Drillings and fixings” at page 3 to complete the code number of the desired hinge.

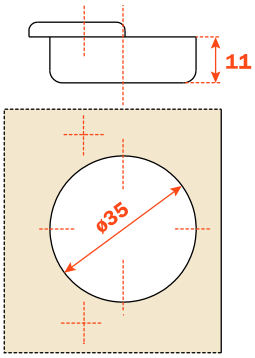

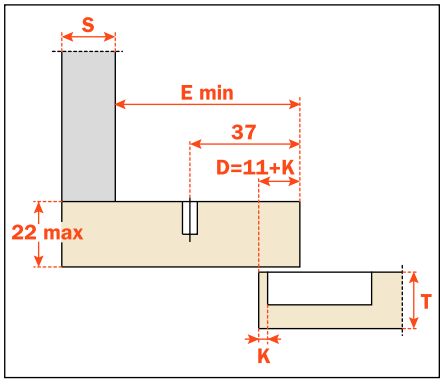

CA - C2_6N99AM

Heights of mounting plates for every assembly.

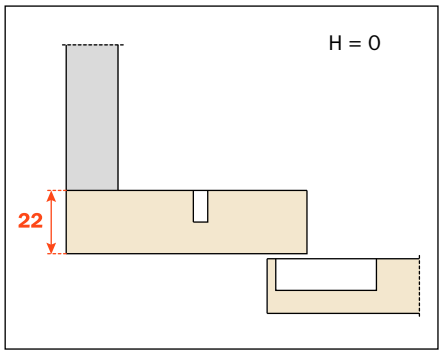

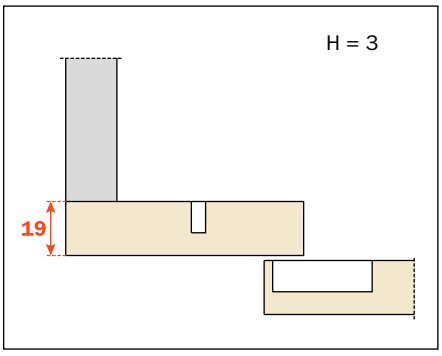

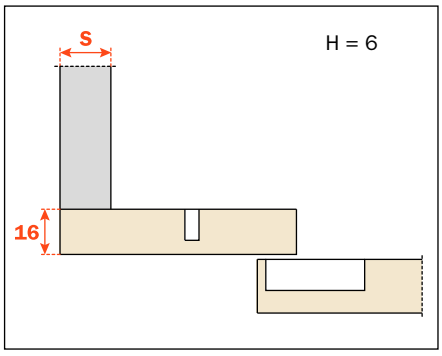

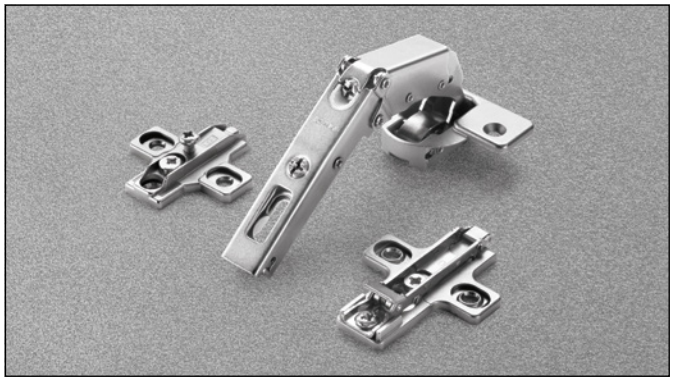

Technical information

Adjustable hinge for corner cabinets.
11 mm deep die-cast cup.
35 mm cup diameter.
Opening angle of the first door 65°.
Possible drilling distance on the door (K): from 3 to 5 mm.
Maximum thickness of the door with square edges: 25 mm.
For thicker doors or doors with mouldings or with large radiussed edges, please refer to our technical assistance.
Compatible with all traditional Series 200 mounting plates and with all Domi snap-on mounting plates.

Packing
Boxes 150 pcs.
Pallets 3.600 pcs.

CA Sprung hinge

C2_YA99R

			
	C2AYA99R	**C2PYA99R**	**C2UYA99R**
			
	C2BYA99R	**C2RYA99R**	**C2WYA99R**

Diagonal adjustment

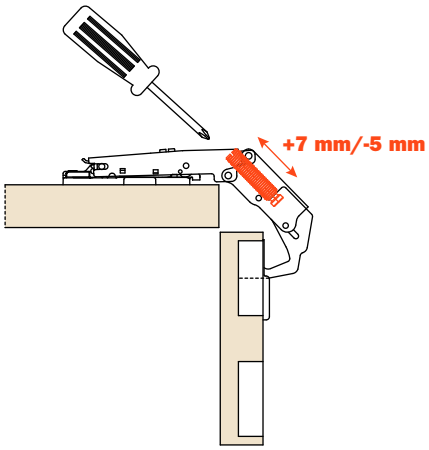

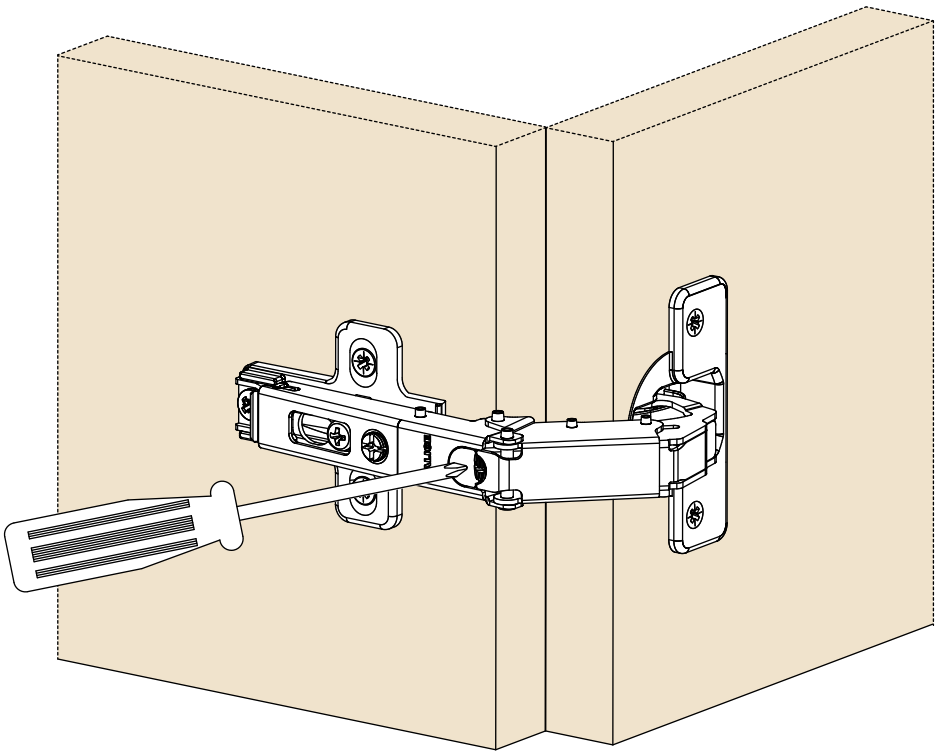

C2_YA99R hinge movement and maximum opening angle

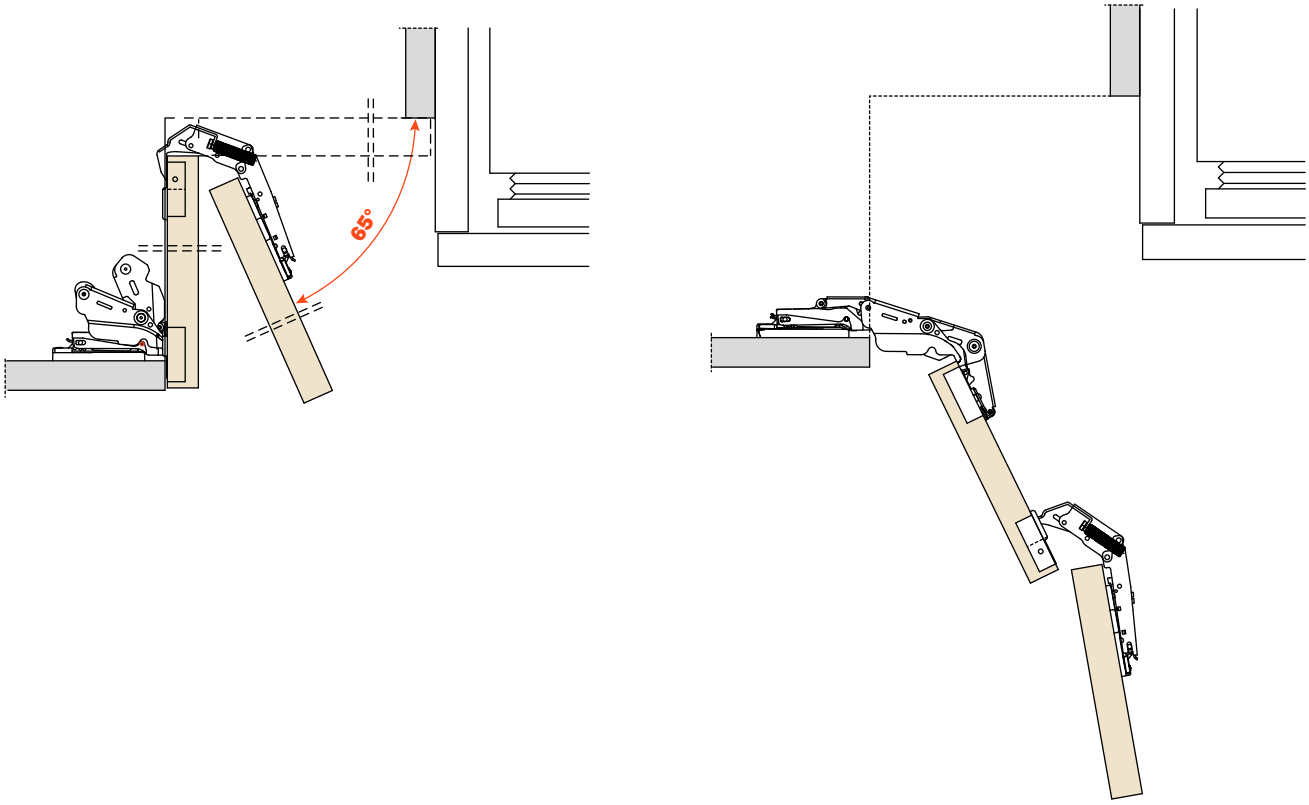

Diagonal adjustment and space required to accommodate the hinge depending on mounting plate used

With H0 mounting plates

Suitable for door thickness from 16 to 25 mm
- For door thickness from 16 to 23 mm, K from 3 to 5 mm
- For door thickness from 24 to 25 mm, K from 3 to 4 mm

The maximum space required to accommodate the hinge with mounting plates
- Series 200 = 61 mm
- Domi = 70 mm
- Domi with back cam = 74 mm

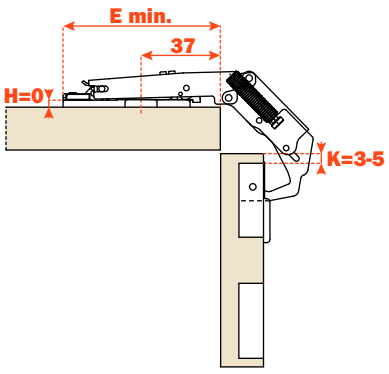

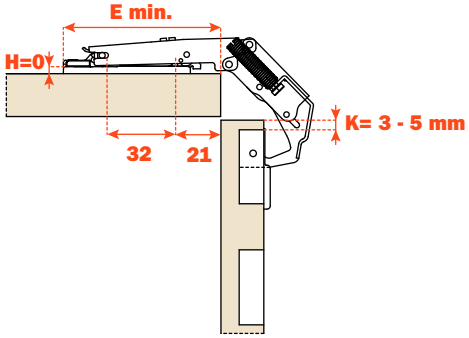

With H3 mounting plates

Suitable for door thickness from 19 to 25 mm
- For door thickness from 19 to 23 mm, K from 3 to 5 mm
- For door thickness from 24 to 25 mm, K from 3 to 4 mm

The maximum space required to accommodate the hinge with mounting plates
- Series 200 = 64 mm
- Domi = 73 mm
- Domi with back cam = 77 mm

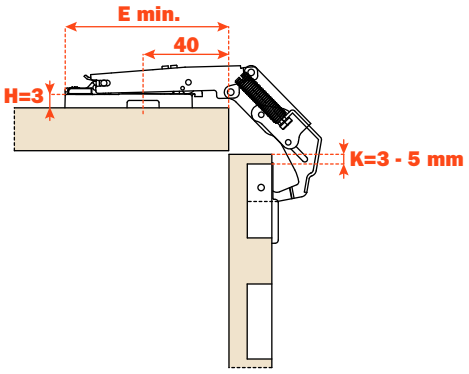

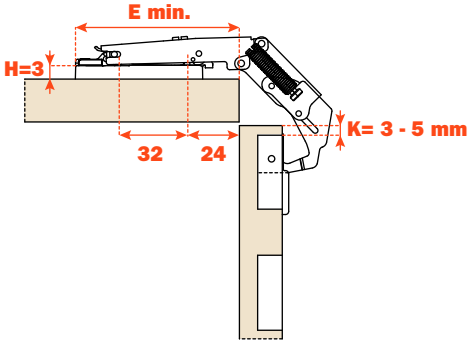

HEADQUARTERS AND PRODUCTION UNITS

ARTURO SALICE S.p.A.

HEAD OFFICE
VIA PROVINCIALE NOVEDRATESE, 10
22060 NOVEDRATE (COMO) ITALIA
TEL. 031 790424 - FAX 031 791508
info.salice@salice.com
www.salice.com

ARTURO SALICE S.p.A.
VIA ARISTIDE MERLONI, 11
61036 COLLI AL METAURO (PU) ITALIA
TEL. 0721 899800
FAX 0721 897980
info.salice@salice.com
www.salice.com

BORTOLUZZI SISTEMI S.p.A.
VIA CADUTI 14 SETTEMBRE 1944, 45
32100 BELLUNO (BL) ITALIA
TEL. 0437 930866
FAX 0437 931442
info@bortoluzzi.com
www.salice.com

NUOVA ATIM S.r.l.
VIA IV NOVEMBRE, 52
20019 SETTIMO MILANESE (MI) ITALIA
TEL. 02 33503203
FAX 02 33516514
info@atimspa.com
www.atimspa.com

VILLES S.r.l.
VIA CASTOLDI, 6/8
20090 TREZZANO SUL NAVIGLIO (MI) ITALIA
TEL. 02 4452083
FAX 02 4452838
info@villes2000.com
www.villes2000.com

BRANCHES

DEUTSCHE SALICE GMBH
RUDOLF DIESEL STR. 10
74382 NECKARWESTHEIM
TEL. 07133 9807-0
FAX. 07133 9807-16
info.salice@deutschesalice.de
www.salice.com

DEUTSCHE SALICE GMBH
VERKAUFSBÜRO NORD
RINGSTRASSE 36/A30 CENTER
32584 LÖHNE
TEL. 05731 15608-0
FAX. 05731 15608-10
vknord@deutschesalice.de
www.salice.com

SALICE UK LTD.
KINGFISHER WAY
HINCHINGBROOKE BUSINESS PARK
HUNTINGDON CAMBS PE 29 6FN
TEL. 01480 413831
FAX. 01480 451489
info.salice@saliceuk.co.uk
www.salice.com

SALICE FRANCE S.A.R.L.
285 RUE DE GOA ZAC LES 3 MOULINS
06600 ANTIBES
TEL. 0493 330069
FAX. 0493 330141
info.salice@salicefrance.com
www.salice.com

SALICE ESPAÑA, S.L.U.
C/ AIGUAFREDA 4, P.I. AMETLLA PARK
08480 L'AMETLLA DEL VALLÈS (BARCELONA)
TEL. 0034 938 46 88 61
info.salice@saliceespana.es
www.salice.com

SALICE PORTUGAL UNIP. LDA
SHOWROOM:
TV SÁ E MELO 161 FA
4470-116 MAIA - PORTO
TEL: 00351 224 154 221
Info@saliceportugal.pt
www.salice.com
ARMAZÉM:
VIA ROTA DOS MÓVEIS I 399
4585-325 GANDRA

SALICE CHINA (SHANGHAI) CO. LTD.
RM 602, 6/F, TOWER 1,
3688 YINGGANG DONG ROAD
QINGPU DISTRICT
201703 SHANGHAI, CHINA
TEL. 021 3988-9880
info.salice@salicechina.com
www.salicechina.com

SALICE INDIA PVT. LTD.
1001 & 1002, 10TH FLOOR,
CENTRUM, PLOT NO. C-3,
OPP. WAGLE PRABHAG SAMITI OFFICE,
MIDC AREA, WAGLE INDUSTRIAL ESTATE,
THANE - 400604, MAHARASHTRA
TEL. 022 20812050
info@saliceindia.com
www.salice.com

SALICE CANADA INC.
3500 RIDGEWAY DRIVE,
UNIT#1
MISSISSAUGA, ONTARIO, L5L 0B4
TEL. 905 820 8787
FAX. 905 820 7226
info.salice@salicecanada.com
www.salicecanada.com

SALICE AMERICA INC.
2123 CROWN CENTRE DRIVE
CHARLOTTE NC. 28227
TEL. 704 841 7810
FAX. 704 841 7808
info.salice@saliceamerica.com
www.saliceamerica.com

We reserve the right to change technical specifications.

ARTURO SALICE S.p.A.

HEAD OFFICE

VIA PROVINCIALE NOVEDRATESE, 10
22060 NOVEDRATE (COMO) ITALIA
TEL. 031 790424 - FAX 031 791508

info.salice@salice.com
www.salice.com

Ed. 02 - 02/2026