




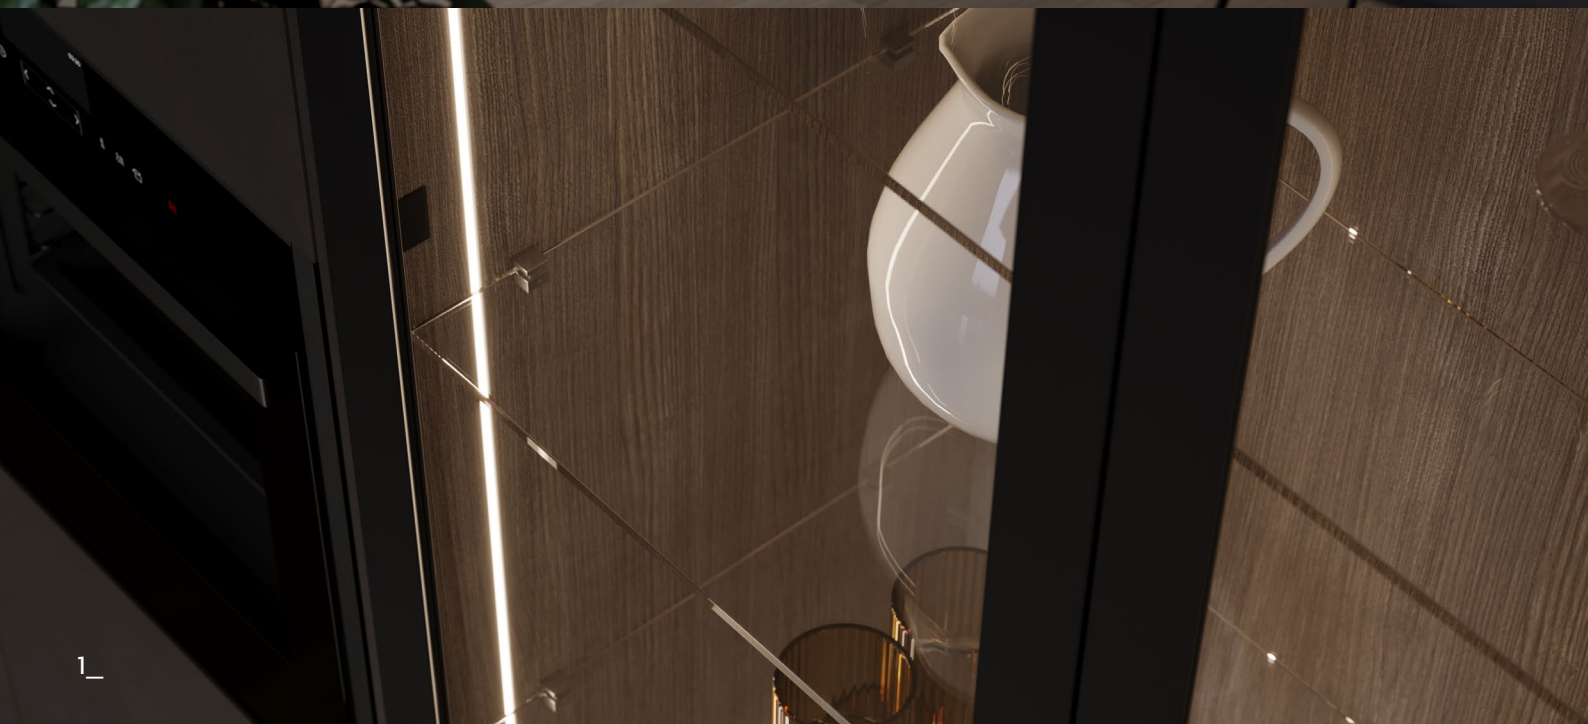

AT6 ULTRA

Plug & Play LED silicone micro profile

Lenght	Watt	Volt
10m	10W/m	24VDC



AT6 ULTRA integrates a FREE-CUT light source that allows it to be cut to the desired length at any point on the profile.





The AT6 ULTRA profile is configurable with power cable, back-to-back connector, and end cap (sold separately), with Plug&Play connection system.



AT6 ULTRA is supplied with a 3M® high-strength adhesive base and with hooks and screws for mechanical fastening to the surface.



The end caps of AT6 ULTRA are the same size as the profile allowing the entire profile to be flush panel recessed into the groove. The power cord may exit axially or radially to the installation surface.

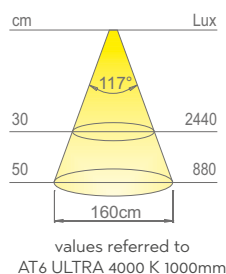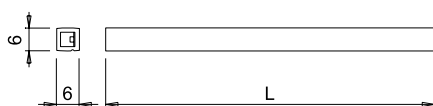

Colour appearance	super warm white	warm white	natural white
Colour temperature	2700 K	3000 K	4000 K
Luminous flux	800 lm/m	800 lm/m	920 lm/m
Luminous efficiency	80 lm/W	80 lm/W	92 lm/W
CRI	Ra 90	Ra 90	Ra 90

AT6 ULTRA



Plug & Play LED silicone micro profile

AT6 ULTRA is a micro profile with symmetrical light projection for surface or flush panel recessed installation on a 6mm wide and 6mm deep milled groove, recommended for use on any furnishing element. The device, with a high-strength 3M® adhesive base, hooks and screws for mechanical surface fixing, is configurable with power cable, back-to-back connector, and end cap (sold separately), with Plug&Play connection system. Developed with milky-effect diffusing silicone coating technology, it integrates a single-colour (UHE) FREE-CUT LED module with 276 LEDs/m allowing it to be cut to the desired length at any point on the profile. Power supply not included, to be ordered separately.



AT6 ULTRA D-M

reel micro-profile siliconic Plug & Play

Lenght	Watt	Volt
10m	10W/m	24VDC



AT6 ULTRA D-M integrates a FREE-CUT light source that allows it to be cut to the desired length at any point on the profile.





The AT6 ULTRA D-M profile is configurable with power cable, back-to-back connector, and end cap (sold separately), with Plug&Play connection system.



AT6 ULTRA D-M is supplied with a 3M® high-strength adhesive base and with hooks and screws for mechanical fastening to the surface.



The end caps of AT6 ULTRA D-M are the same size as the profile allowing the entire profile to be flush panel recessed into the groove. The power cord may exit axially or radially to the installation surface.

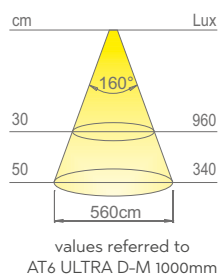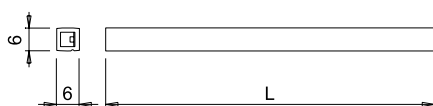

Colour appearance	D-Motion white
Colour temperature	2700 - 4000 K
Luminous flux	1000 lm/m
Luminous efficiency	100 lm/W
CRI	Ra 90

AT6 ULTRA D-M



micro-profile dual-colour LED siliconic Plug & Play

AT6 ULTRA D-Motion is a micro profile with symmetrical light projection for surface or flush panel recessed installation on a 6mm wide and 6mm deep milled groove, recommended for use on any furnishing element. The device, with a high-strength 3M® adhesive base, hooks and screws for mechanical surface fixing, is configurable with power cable, back-to-back connector, and end cap (sold separately), with Plug&Play connection system. Developed with milky-effect diffusing silicone coating technology, it integrates a dual colour (SHE) FREE-CUT LED module with 156 +156 LEDs/m allowing it to be cut to the desired length at any point on the profile. Power supply not included, to be ordered separately.





AT6 ULTRA POWER CABLE

with Micro24 connector

Codice*	Lunghezza	Finitura
F0001000015	2000mm	white
F0001000016	2000mm	black

*silicone profile closure cap included

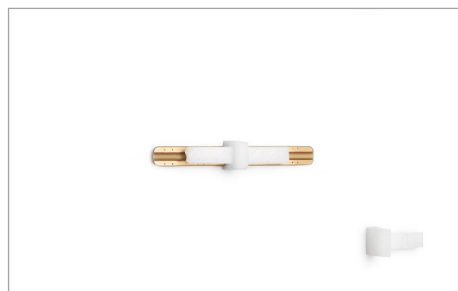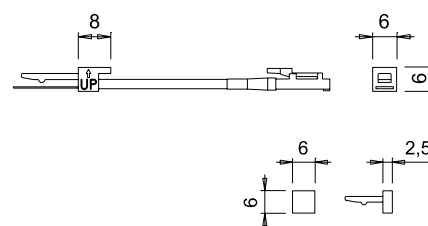

AT6 ULTRA BACK-TO-BACK CONNECTOR

for back-to-back connection

Code*	F0004000001
-------	-------------

*silicone profile closure cap included

